

Preparation unit——GA Series

GAL Series Lubricator

Symbol



Product feature

1. The structure of oil dripping adopts gap seal type, which makes the adjustment of oil supply more reliable.
2. Oil feed ring can only make one full turn. The quantity of oil supply basically takes on linear distribution. The quantity of oil supply can be generally calculated according to the position of graduation ring.
3. Special drip nozzle structure will produce negative pressure in oil dripping outlet and the mist flow is minimal.
4. Three material of bowl are available: PC, Nylon and metal.
5. Filling of oil while the lubricator is under pressure is made possible, and the oil bowl is large.
6. The bracket can be selected for installation.

Specification

Model	GAL200-06	GAL200-08	GAL300-08	GAL300-10	GAL300-15	GAL400-10	GAL400-15	GAL500-20	GAL600-20	GAL600-25
Fluid	Air									
Port size [Note1]	1/8"	1/4"	1/4"	3/8"	1/2"	3/8"	1/2"	3/4"	3/4"	1"
Pressure range	0.05~0.9MPa(7~130psi)									
Proof pressure	1.5MPa(215psi)									
Temperature range	-5~70°C(Unfreeze)									
Recommended lubricant	ISO VG 32 or equivalent									
Capacity of oil bowl	36CC		98CC			185CC		225CC	410CC	
Weight	200g		370g			660g		700g	1040g	

[Note1] PT thread, G thread and NPT thread are available.


Ordering code

GAL300 ☐ **10** ☐ **G**

① ② ③ ④ ⑤

① Model	② Bowl material	③ Port size	④ Accessories	⑤ Thread type
GAL200: GA200 Lubricator	Blank: PC bowl C: Metal bowl N: Nylon bowl	06: 1/8" 08: 1/4"	Blank: Bracket J: No bracket	Blank: PT G: G T: NPT
GAL300: GA300 Lubricator		08: 1/4" 10: 3/8" 15: 1/2"		
GAL400: GA400 Lubricator		10: 3/8" 15: 1/2"		
GAL500: GA500 Lubricator		20: 3/4"		
GAL600: GA600 Lubricator	C: Metal bowl	20: 3/4" 25: 1"		

Inner structure





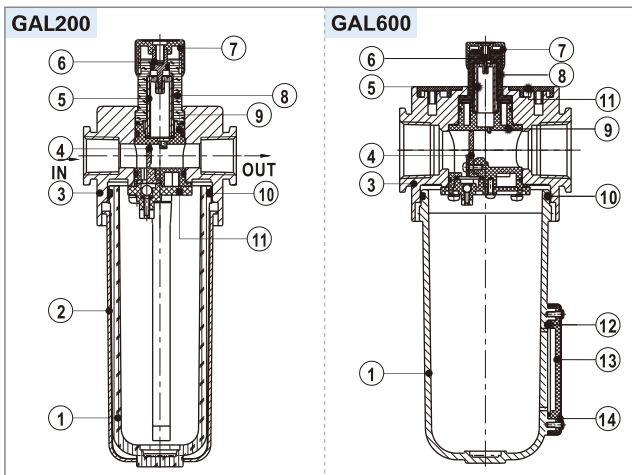


No.	Item	Material
1	Oil bowl	Aluminum alloy \ PC \ Nylon
2	Meter cover	SPCC
3	Body of lubricator	Aluminum alloy
4	Distance block	PU
5	Drip pipe	PC
6	Ejector pin	Brass
7	Adjusting ring	POM
8	Adjusting looker	PC
9	Sprayer body	PA66
10	O-ring	NBR
11	Sprayer bottom cap	POM
12	Liquid meter seal	NBR
13	Liquid meter inside cover	PC
14	Liquid meter cover	SPCC


Preparation unit——GA Series

GAL Series Lubricator

Flow chart

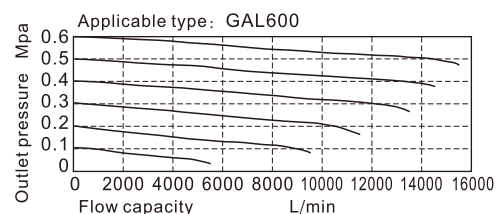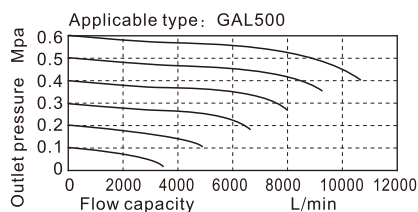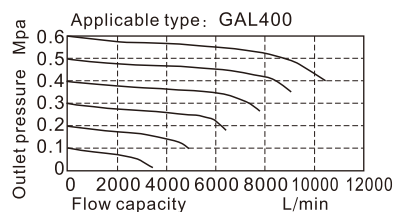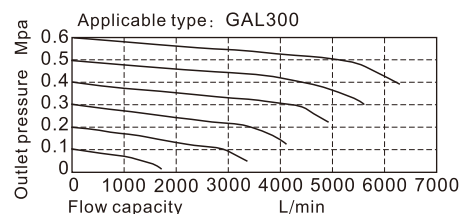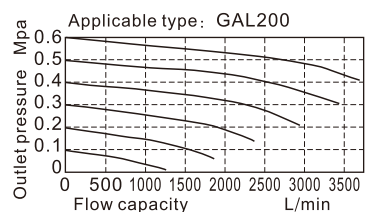

Dimensions

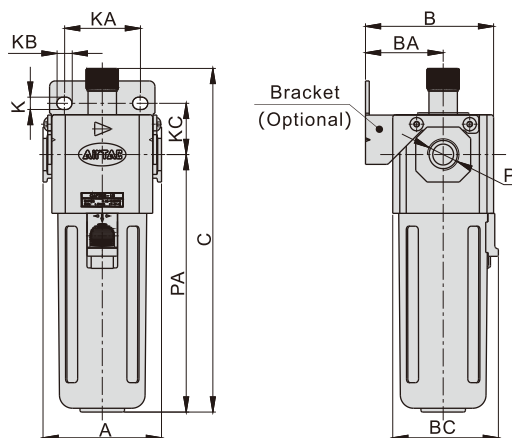

Model\Item	A	B	BA	C	K	KA	KB	KC	P	PA
GAL200-06	52.5	54.5	33	146.5	5.4	27	8.4	23	1/8"	107
GAL200-08	52.5	54.5	33	146.5	5.4	27	8.4	23	1/4"	107
GAL300-08	62.5	67.5	41	181	6.5	40	8	27	1/4"	136
GAL300-10	62.5	67.5	41	181	6.5	40	8	27	3/8"	136
GAL300-15	62.5	67.5	41	181	6.5	40	8	27	1/2"	136
GAL400-10	80	84	50	204.5	8.5	55	11	33.5	3/8"	155
GAL400-15	80	84	50	204.5	8.5	55	11	33.5	1/2"	155
GAL500-20	82	85	50	218.5	8.5	55	11	33.5	3/4"	169
GAL600-20	100	113	70	246	11	66	13	50	3/4"	182.5
GAL600-25	100	113	70	246	11	66	13	50	1"	182.5

Preparation unit——GA Series

GAL100 Series Lubricator



Symbol



Specification

Model	GAL100M5	GAL10006
Fluid	Air	
Port size [Note1]	M5	1/8"
Pressure range	0.05~0.9MPa(7~130psi)	
Proof pressure	1.5MPa(215psi)	
Temperature range	-5~70°C(Unfreeze)	
Recommended lubricant	ISO VG 32 or equivalent	
Capacity of oil bowl	9CC	
Weight	59g	

[Note1] G thread is available.

Ordering code


GAL100 □ 06 J G

① ② ③ ④ ⑤


①Model	②Bowl material	③Port size	④Accessories	⑤Thread type[Note1]
GAL100: GA100 Lubricator	Blank : PC	M5: M5 06: 1/8"	J : No bracket	G: G

[Note 1] Standard M5 thread is blank here.


Flow chart

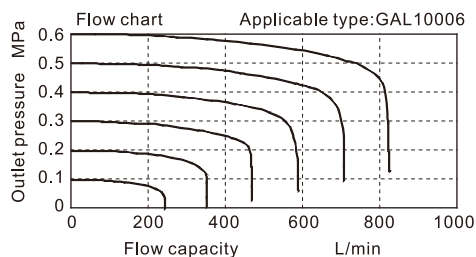

Dimensions

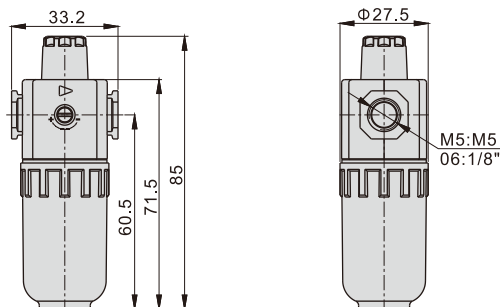

Inner structure

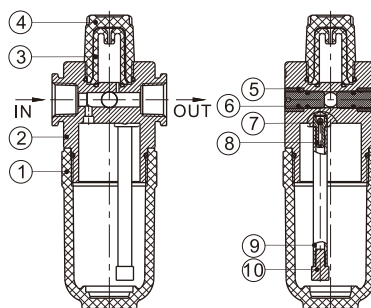

No.	Item	Material
1	Oil bowl	PC
2	Body	Aluminum alloy
3	Drip pipe	PC
4	Sight window	PC
5	Adjusting screw	Brass
6	Fixing nut	Aluminum alloy
7	Steel ball	Stainless steel
8	Tube nozzle	Aluminum alloy
9	Tube	PU
10	Lubricant filter	Sintered bronze