






AM

-  **Raccordi per spirali**
-  **Coils fittings**
-  **Spiralefedern**
-  **Raccords pour spirales**
-  **Racordaje para espirales**

AM60



AM65



AM67



AM70



AM75










AM80





AM85







-  **Dati tecnici di raccordi per spirali**
-  **Coils fittings technical data**
-  **Technischen Daten der Spiralefedern**
-  **Données techniques des Raccords pour spirales**
-  **Datos técnicos de los racordaje para espirales**


-  **Caratteristiche principali**
 - Gamma completa 1/8 - 1/2"
 - Filettatura BSPP cilindrica UNI-ISO228, BSPT conica UNI-ISO 7
 - Vasta gamma
 - Robustezza meccanica
-  **Principales caractéristiques**
 - Gamme complète 1/8 - 1/2"
 - Filetage cylindrique BSPP UNI-ISO 228, conique BSPT UNI-ISO 7
 - Large gamme
 - Résistance mécanique

-  **Main features**
 - Complete Range 1/8 - 1/2"
 - BSPP cylindrical thread UNI-ISO 228, conical BSPT UNI-ISO 7
 - Wide range
 - Mechanical Resistance
-  **Características principales**
 - Gama completa 1/8-1/2"
 - BSPP rosca cilíndrica UNI-ISO 228, cónica BSPT UNI-ISO 7
 - Amplia gama
 - Robustez mecánica

-  **Hauptmerkmale**
 - Vollständiges Sortiment 1/8 - 1/2"
 - BSPP-zylindrisches Gewinde UNI-ISO 228, konisch BSPT UNI-ISO 7
 - Große Auswahl
 - Mechanische Festigkeit

-  **Applicazioni**
 - Aria Compressa
 - Impianti per automazione pneumatica
 - Gas inerti
 - Vuoto
-  **Applications**
 - Air comprimé
 - Installations pour l'automatisation pneumatique
 - Gaz neutres
 - Vide

-  **Applications**
 - Compressed Air
 - Systems for pneumatic automation
 - Inert Gases
 - Vacuum
-  **Aplicaciones**
 - Aire comprimido
 - Instalaciones para automación neumática
 - Gases inertes
 - Vacío

-  **Anwendungen**
 - Druckluft
 - Systeme für die pneumatische Automatisierung
 - Inertgase
 - Leer

-  **Fluido**


Acqua, olio, aria compressa
-  **Fluid**


Water, oils, compressed air
-  **Fluid**


Wasser, oel, druckluft
-  **Fluide**


Eau, huile, air comprimé
-  **Fluido**


Agua, aceite, aire comprimido

-  **Filettatura**

BSPP cilindrica UNI-ISO228
-  **Thread types**

BSPP parallel UNI-ISO228
-  **Gewinde**

BSPP zylindrisch UNI-ISO228
-  **Filetage**

BSPP cylindrique UNI-ISO228
-  **Roscado**

BSPP cilíndrico UNI-ISO 228

-  **Filetti**

Filettature da 1/4 a 3/8"
-  **Threads**

Threads from 1/4 to 3/8"
-  **Gewinde**

Gewinde von 1/4 bis 3/8"
-  **Filets**

Filetages de 1/4 à 3/8"
-  **Roscas**

Roscas de 1/4 a 3/8"

Materiali

Ottone e acciaio

Matériels

Laiton et acier

Materials

Brass and steel

Materiales

Latón y acero


Werkstoffen

Messing und Stahl

| Pressione e temperatura | Pressure and Temperature | Druck und Temperatur | Pression et Température | Presión y Temperatura |
|-----------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|
| Pressione: 12 Bar | Pressure: 12 Bar | Druck: 12 Bar | Pression: 12 bar | Presión: 12 Bar |
| Temperatura: -18°C / +80°C | Temperature: 0°F / +176°F | Temperatur: -18°C / +80°C | Température: -18°C / +80°C | Temperatura: -18°C / +80°C |

| Portata | Flow | Mengenstrom | Débit | Caudal |
|-----------------------------|--------------------------|---------------------------------|---------------------------|----------------------------|
| Portata: 2000 l/min. | Flow: 2000 l/min. | Mengenstrom: 2000 l/min. | Débit: 2000 l/min. | Caudal: 2000 l/min. |

AM 60

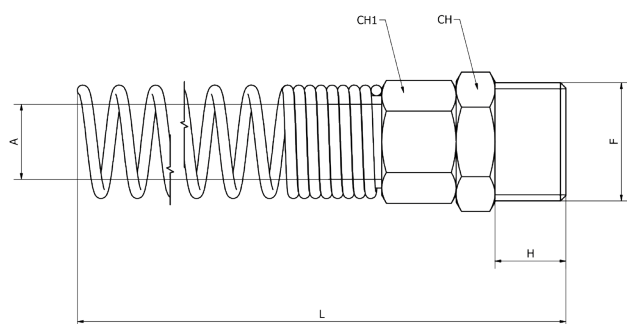


Attacco maschio fisso con molla

- Fixed male spring
- Spiralefedern
- Jonction mâle avec ressort
- Racor macho con muelle

| CODICE/CODE | F | H | A | L | CH | CH1 | PEZZI/PIECES |
|-------------------|------|---|--------|-------|----|-----|--------------|
| AM60140406 | G1/4 | 8 | 04x06 | 98 | 14 | 12 | 10 |
| AM60140508 | G1/4 | 8 | 05x08 | 108 | 14 | 13 | 10 |
| AM60140608 | G1/4 | 8 | 06x08 | 108 | 14 | 13 | 10 |
| AM60146510 | G1/4 | 8 | 6,5x10 | 110,5 | 14 | 15 | 10 |
| AM60140810 | G1/4 | 8 | 08x10 | 108,5 | 14 | 15 | 10 |
| AM60140812 | G1/4 | 8 | 08x12 | 111,5 | 15 | 17 | 10 |
| AM60141012 | G1/4 | 8 | 10x12 | 110,5 | 15 | 17 | 10 |
| AM60380810 | G3/8 | 9 | 08x10 | 110,5 | 17 | 15 | 10 |
| AM60381012 | G3/8 | 9 | 10x12 | 112,5 | 17 | 17 | 10 |

AM 65

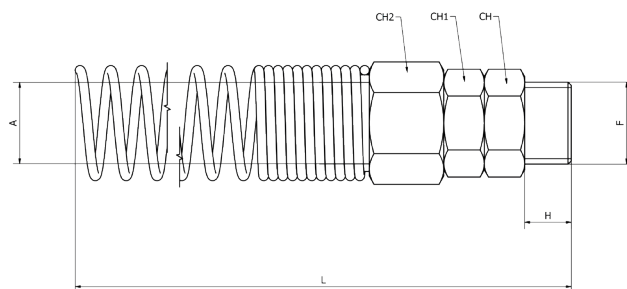


Attacco maschio girevole con molla

- Rotating male spring
- Spiralefedern
- Jonction mâle orientable avec ressort
- Racor macho orientable con muelle

| CODICE/CODE | F | H | A | L | CH | CH1 | CH2 | PEZZI/PIECES |
|-------------------|------|-----|--------|-------|----|-----|-----|--------------|
| AM65140406 | G1/4 | 8 | 04x06 | 105 | 15 | 15 | 12 | 10 |
| AM65140508 | G1/4 | 8 | 05x08 | 115 | 15 | 15 | 13 | 10 |
| AM65140608 | G1/4 | 8 | 06x08 | 115 | 15 | 15 | 13 | 10 |
| AM65146510 | G1/4 | 8 | 6,5x10 | 117 | 15 | 15 | 15 | 10 |
| AM65140810 | G1/4 | 8 | 08x10 | 116,5 | 15 | 15 | 15 | 10 |
| AM65140812 | G1/4 | 8 | 08x12 | 120 | 15 | 15 | 17 | 10 |
| AM65141012 | G1/4 | 8 | 10x12 | 117 | 15 | 15 | 17 | 10 |
| AM65380810 | G3/8 | 9,2 | 08x10 | 118 | 17 | 17 | 15 | 10 |
| AM65380812 | G3/8 | 9,2 | 08x12 | 118 | 17 | 17 | 17 | 10 |
| AM65381012 | G3/8 | 9,2 | 10x12 | 118 | 17 | 17 | 17 | 10 |

AM 67

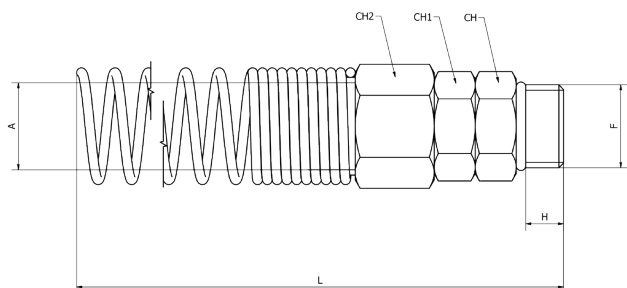

Attacco maschio con O-ring girevole con molla

Rotating male spring with O-ring


Spiralefedern mit O-Ring

Jonction mâle orientable O-ring avec ressort

Racor macho orientable O-ring con muelle

| CODICE/CODE | F | H | A | L | CH | CH1 | CH2 | PEZZI/PIECES |
|-------------------|------|-----|--------|-------|----|-----|-----|--------------|
| AM67140406 | G1/4 | 6,5 | 04x06 | 105 | 15 | 15 | 12 | 10 |
| AM67140508 | G1/4 | 6,5 | 05x08 | 115 | 15 | 15 | 13 | 10 |
| AM67140608 | G1/4 | 6,5 | 06x08 | 115 | 15 | 15 | 13 | 10 |
| AM67146510 | G1/4 | 6,5 | 6,5x10 | 117,5 | 15 | 15 | 15 | 10 |
| AM67140810 | G1/4 | 6,5 | 08x10 | 117,5 | 15 | 15 | 15 | 10 |
| AM67140812 | G1/4 | 6,5 | 08x12 | 117,5 | 15 | 15 | 17 | 10 |
| AM67141012 | G1/4 | 6,5 | 10x12 | 117,5 | 15 | 15 | 17 | 10 |

AM 70

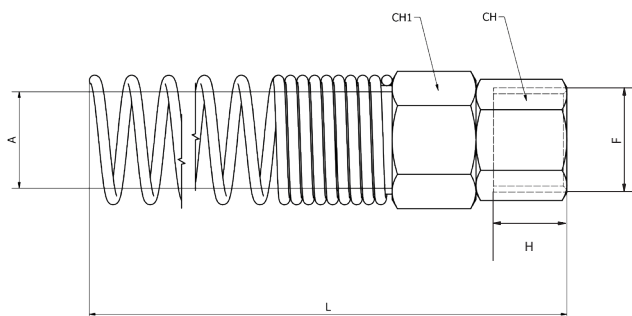

Attacco femmina con molla

Fixed female spring


Spiralefedern

Jonction femelle avec ressort

Racor hembra con muelle

| CODICE/CODE | F | H | A | L | CH | CH1 | PEZZI/PIECES |
|-------------------|------|------|--------|-------|----|-----|--------------|
| AM70140406 | G1/4 | 10,5 | 04x06 | 96,5 | 15 | 12 | 10 |
| AM70140508 | G1/4 | 10,5 | 05x08 | 108 | 15 | 13 | 10 |
| AM70140608 | G1/4 | 10,5 | 06x08 | 107,5 | 15 | 13 | 10 |
| AM70146510 | G1/4 | 10,5 | 6,5x10 | 110 | 15 | 15 | 10 |
| AM70140810 | G1/4 | 10,5 | 08x10 | 110 | 15 | 15 | 10 |
| AM70140812 | G1/4 | 10,5 | 08x12 | 110 | 15 | 17 | 10 |
| AM70141012 | G1/4 | 10,5 | 10x12 | 110 | 15 | 17 | 10 |

AM 75

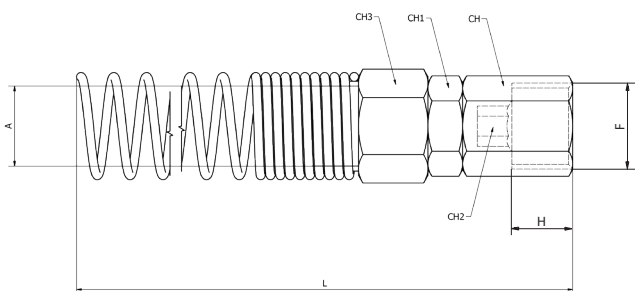

Attacco femmina girevole con molla

Rotating female spring


Spiralefedern

Jonction femelle orientable avec ressort


Racor hembra orientable con muelle

| CODICE/CODE | F | H | A | L | CH | CH1 | CH2 | CH3 | PEZZI/PIECES |
|-------------------|------|------|--------|-----|----|-----|-----|-----|--------------|
| AM75140406 | G1/4 | 11 | 04x06 | 118 | 15 | 15 | 5 | 12 | 10 |
| AM75140508 | G1/4 | 11 | 05x08 | 122 | 15 | 15 | 5 | 13 | 10 |
| AM75140608 | G1/4 | 11 | 06x08 | 120 | 15 | 15 | 5 | 13 | 10 |
| AM75146510 | G1/4 | 11 | 6,5x10 | 124 | 15 | 15 | 5 | 15 | 10 |
| AM75140810 | G1/4 | 11 | 08x10 | 124 | 15 | 15 | 5 | 15 | 10 |
| AM75140812 | G1/4 | 11 | 08x12 | 126 | 15 | 15 | 5 | 17 | 10 |
| AM75141012 | G1/4 | 11 | 10x12 | 126 | 15 | 15 | 5 | 17 | 10 |
| AM75380810 | G3/8 | 11,5 | 08x10 | 128 | 19 | 17 | 6 | 15 | 10 |
| AM75380812 | G3/8 | 11,5 | 08x12 | 130 | 19 | 17 | 6 | 17 | 10 |
| AM75381012 | G3/8 | 11,5 | 10x12 | 130 | 19 | 17 | 6 | 17 | 10 |

AM 80

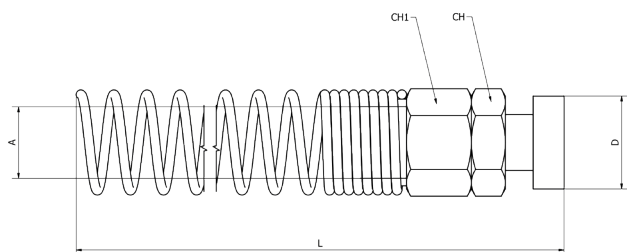

 **Attacco baionetta con molla**

 Bayonet with spring


 Spiralefedern

 Douille a baïonnette avec ressort

 Racor hembra con muelle

| CODICE/CODE | A | D | L | CH | CH1 | PEZZI/PIECES |
|-------------------|-------|----|-------|----|-----|--------------|
| AM80140406 | 04x06 | 15 | 99,5 | 15 | 12 | 10 |
| AM80140608 | 06x08 | 15 | 110 | 15 | 13 | 10 |
| AM80140810 | 08x10 | 15 | 111,5 | 15 | 15 | 10 |
| AM80141012 | 10x12 | 15 | 112 | 15 | 17 | 10 |

AM 85

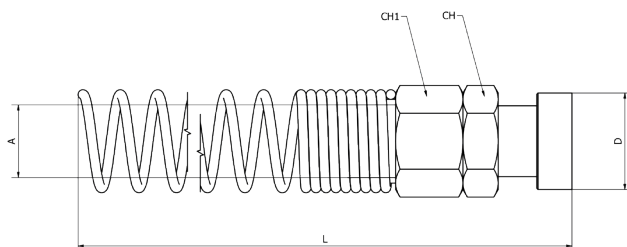

 **Attacco baionetta girevole con molla**

 Rotating bayonet with spring

 Spiralefedern

 Douille a baïonnette avec ressort

 Racor bayoneta con muelle

| CODICE/CODE | A | D | L | CH | CH1 | PEZZI/PIECES |
|-------------------|--------|----|-------|----|-----|--------------|
| AM85140406 | 04x06 | 15 | 108,5 | 15 | 12 | 10 |
| AM85140508 | 05x08 | 15 | 111,5 | 15 | 13 | 10 |
| AM85140608 | 06x08 | 15 | 111,5 | 15 | 13 | 10 |
| AM85146510 | 6,5x10 | 15 | 112,5 | 15 | 15 | 10 |
| AM85140810 | 08x10 | 15 | 113 | 15 | 15 | 10 |
| AM85140812 | 08x12 | 15 | 133,5 | 15 | 17 | 10 |
| AM85141012 | 10x12 | 15 | 133,5 | 15 | 17 | 10 |