




Clamping cylinder—MCK Series


Compendium of MCK Series

Dustproof and welding slag out design


There is a scraping dust ring in front cover, and it is firm and durable that can avoid dust and splashed welding slag breaking cylinders. It is more reliable than dust helmet.

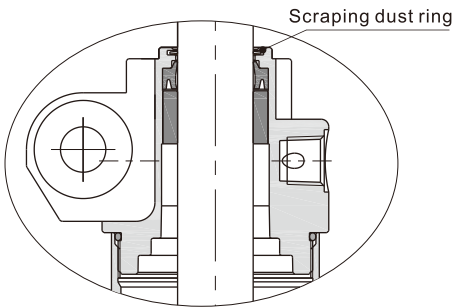

Y knuckle is available



Y: With M6 thread hole



YW: Without M6 thread hole

Buffer adjustment and speedlimit adjustment are built-in


Various types of sensor switches are available.

1. The Anti-magnetic sensor should be used with the anti-magnetic bracket. For details, refer to page P509.
2. Common sensors (DMSG, CMSG) should be used with the sensor holder (F-MCK40G). Please refer to common sensors for details about DMSG and CMSG sensor. The matching sensor holders need to be ordered separately. The ordering method and installation method are as follows:

Sensor holder's ordering code	F-MCK40G(Matching with MCK)
-------------------------------	-----------------------------

- Installation steps:**
1. The sensor is installed in the G-shaped groove of the sensor fixing base and locked with a slotted screwdriver;
 2. The sensor holder is installed on the fixing bar, moves to a proper position and closes to the outer cylinder of the cylinder, and then tightens the hexagonal cap screws with the hexagonal wrench.
 3. Avoid mechanical damage during installation;
 4. When installing, pay attention to avoid interference with peripheral components.

Sensor's installation method

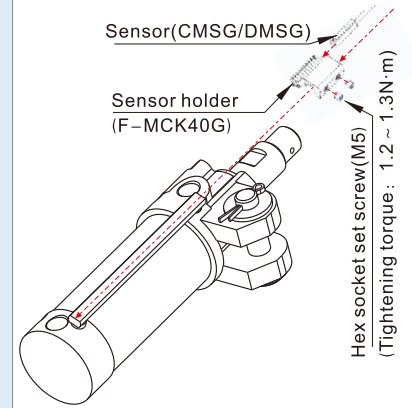

Two orifice models air available

Rolling packed structure

Back cover and barrel adopt riveted rolling packed structure to form a reliable connection.

Theoretical clamping force

Unit: Newton(N)


Bor	Rod size	Acting type	Operating pressure(MPa)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
25	12	Double Push side	49.1	98.2	147.3	196.4	245.5	294.6	343.7	392.8
		acting Pull side	37.8	75.6	113.4	151.2	189.0	226.8	264.6	302.4
32	12	Double Push side	80.4	160.8	241.2	321.6	402.0	482.4	562.8	643.2
		acting Pull side	69.1	138.2	207.3	276.4	345.5	414.6	483.7	552.8
40	20	Double Push side	125.6	251.2	376.8	502.4	628.0	753.6	879.2	1004.8
		acting Pull side	94.2	188.4	282.6	376.8	471.0	565.2	659.4	753.6
50	20	Double Push side	196.3	392.6	588.9	785.2	981.5	1177.8	1374.1	1570.4
		acting Pull side	164.9	329.8	494.7	659.6	824.5	989.4	1154.3	1319.2
63	20	Double Push side	311.7	623.4	935.1	1246.8	1558.5	1870.2	2181.9	2493.6
		acting Pull side	280.3	560.6	840.9	1121.2	1401.5	1681.8	1962.1	2242.4
80	25	Double Push side	502.6	1005.2	1507.8	2010.4	2513.0	3015.6	3518.2	4020.8
		acting Pull side	453.6	907.2	1360.8	1814.4	2268.0	2721.6	3175.2	3628.8

Installation and application



1. In normal situation such as: edge packing, installation, jig test...and so on. Standard cylinder is suggested.
2. In case of high-magnetic field generated by welding in the vicinity, anti-magnetic welding clamp cylinder shall be used and corresponding anti-magnetic sensor switch shall be matched.
3. Before cylinder connecting, the dust must be eliminated to avoid it entering in the cylinder.
4. The medium used by cylinder shall be filtered to 40µm or below.
5. Under high temperature environment, the cylinder of high-temperature resistance shall be selected. Anti-freezing measure shall be adopted under low temperature environment to prevent the water freezing in cylinder.
6. If cylinder is not used for a long time, please advert the surface to get rusty. Inlet and outlet ports should be have anti-dust caps and also spread the oil to avoid getting rusty on piston rod.

Application examples

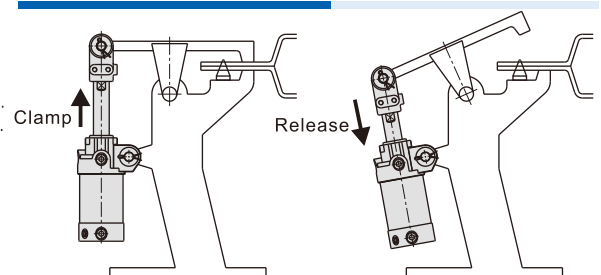


Clamping cylinder

MCK Series



Symbol



Stroke

Bore size(mm)	Standard stroke(mm)	Available stroke
25、32、40、50、63、80	50 75 100 125 150	150

Remark) Consult us for non-standard stroke.

Specification

Bore size(mm)	25	32	40	50	63	80
Acting type	Double acting					
Fluid	Air(to be filtered by 40μm filter element)					
Operating pressure	0.15~1.0MPa(22~145psi)					
Proof pressure	1.5MPa(215psi)					
Temperature	-20~70 °C					
Speed range	50~500mm/s					
Cushion type	Bumper	Variable cushion for back cover or front cover(optional)				
Speed controlled valve	No	Standard setting for covers				
Lubrication	Not required					
Installation type	Double hinged-supports					
Port size [Note1]	1/8"		1/4"		3/8"	

[Note1]G thread is available.

Product feature

1. It suits for workshops that make automation welding.
2. There is a scraping dust ring in front cover, and it is firm and durable that can avoid dust and splashed welding slag breaking cylinders. It is more reliable than dust helmet.
3. It fits the working environment where has strong magnetic field, if it uses the sensor switch which is with strong magnet and anti-strong magnetic field.
4. Inlet interface are optional on three sides; buffer adjustment and speed limit adjustment are built-in.
5. Various types of sensor switches are available.

Ordering code


MCK A 50 x 75 S □ Y G



① Model	② Orifice model	③ Bore size	④ Stroke	⑤ Magnet	⑥ Mounting type	⑦ Mounting type	⑧ Thread type	
MCK: Clamping cylinder (Double acting)	A: Orifice model A	25	Refer to Stroke table for detail	Blank: Without magnet S: With normal magnet[Note 1]	E: One group air port in the front and back cover(No variable cushion) 	Blank: Without Y knuckle 	YW: With Y knuckle (No M6 thread hole) 	G: G Thread
		32			Blank: Three groups air port in the front and back cover (Variable cushion for back and front cover) 	Blank: Without Y knuckle 		
	B: Orifice model B	40			E: One group air port in the front and back cover(Variable cushion for back cover) 	Y: With Y knuckle (With M6 thread hole) 	YW: With Y knuckle (No M6 thread hole) 	
	50	Variable cushion for back cover and front cover 						
	63							
	No this code	80			Variable cushion for back cover 			

[Note1] In powerful magnetic field, sensor switch for high-magnet shall be matched. Please refer to Page 509 for option.

Inner structure and material of major parts

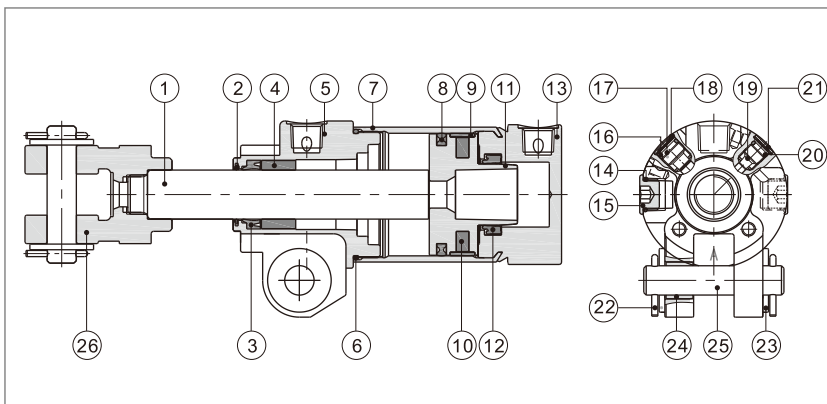


No.	Item	Material	No.	Item	Material
1	Piston rod	Carbon steel	15	Stop screw	S35C
2	Scraping dust ring	Stainless steel	16	O-ring	NBR
3	Spool packing	NBR	17	Cush controlled screw	Aluminum alloy
4	Sliding bushing	Aluminum alloy	18	Bead flange	Spring steel
5	Front cover	Aluminum alloy	19	Speed controlled screw	Aluminum alloy
6	O-ring	NBR	20	O-ring	NBR
7	Barrel	Aluminum alloy	21	Bead flange	Spring steel
8	Piston O-ring	NBR	22	Orifice Pin	Midl steel
9	Wear ring	Wear resistant material	23	Cover blade	SPCC
10	Magnet	Magnetism material	24	Sliding bushing	Wear resistant material
11	Piston	Aluminum alloy	25	Pin	S45C
12	Cushion O-ring	TPU	26	Y knuckle	Nodular cast iron
13	Back cover	Aluminum alloy			
14	O-ring	NBR			

Clamping cylinder


MCK Series

Dimensions


φ25(Without magnet)

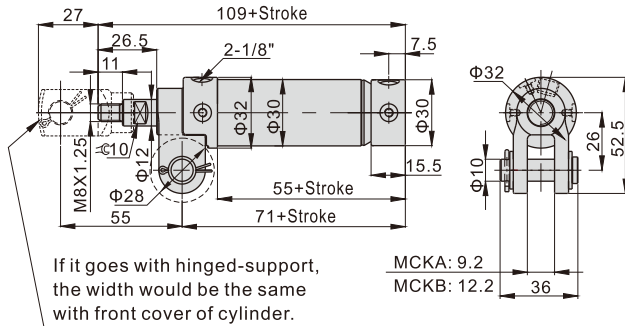


φ25(With magnet)

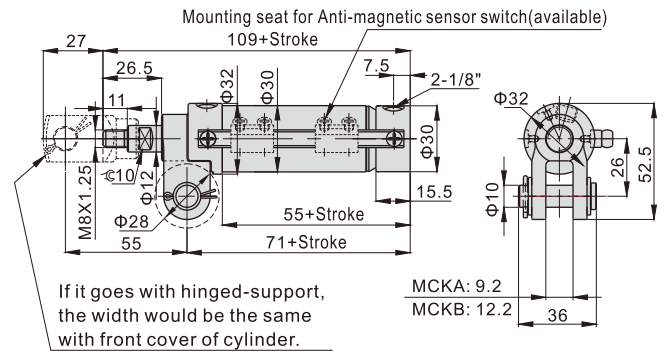



φ32(Without magnet)

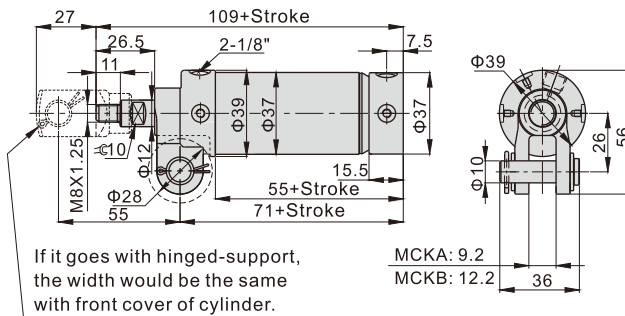

φ32(With magnet)


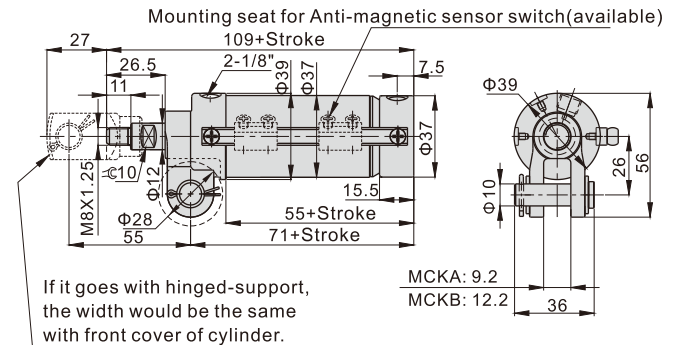


φ40/50/63(Without magnet)

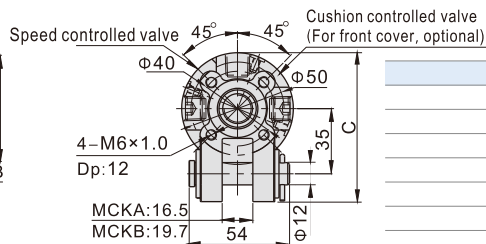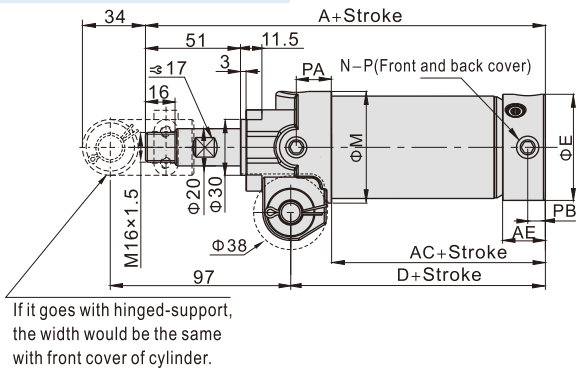

Item\Bore size	40	50	63	
A	162	165	167	
AC	59	65	67	
AE	20	22	23	
C	76	80	87	
D	84	87	89	
E	47	57	70	
M	52	60	74	
N (Number of hole)	Variable cushion for back and front cover	6	6	6
	Variable cushion for back cover	2	2	2
P(Inlet and out let port)			1/4"	
	PA	20	19	19
	PB	9	9.5	9.5

φ40/50/63(With magnet)

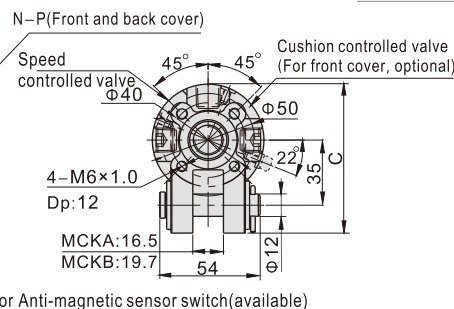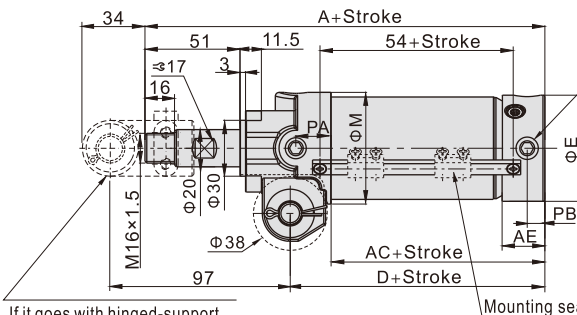


Clamping cylinder


MCK Series

Φ80(Without magnet)

If it goes with hinged-support, the width would be the same with front cover of cylinder.

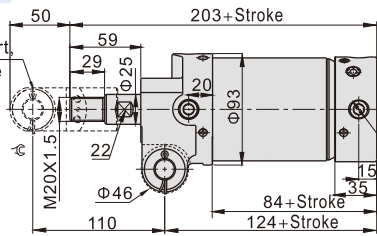


Variable cushion for back and front cover type: 6-3/8"
Variable cushion for back cover type: 2-3/8"

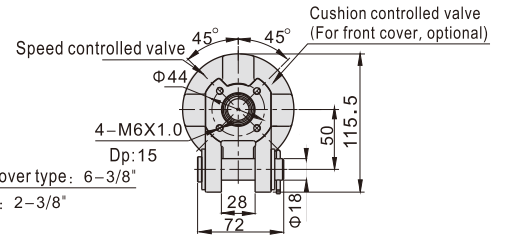


Φ80(With magnet)

If it goes with hinged-support, the width would be the same with front cover of cylinder.

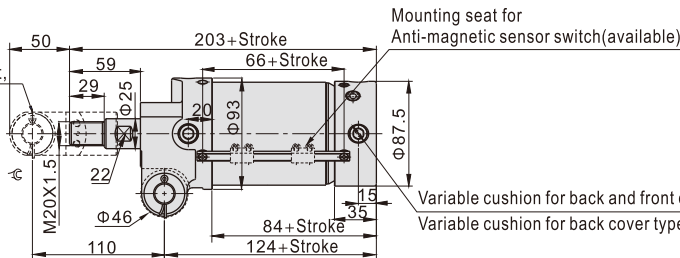


Variable cushion for back and front cover type: 6-3/8"
Variable cushion for back cover type: 2-3/8"

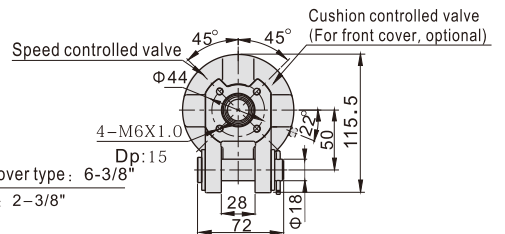


Specifications and ordering codes of Y knuckle

Φ25/32

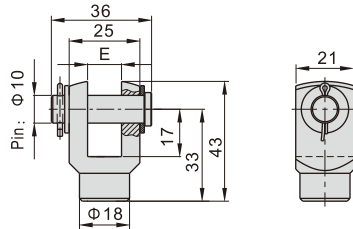


Model	Ordering code	Applicable bore size	E
MCKA	MCKA25-YW	25\32	9
MCKB	MCKB25-YW	25\32	12

Φ40/50/63

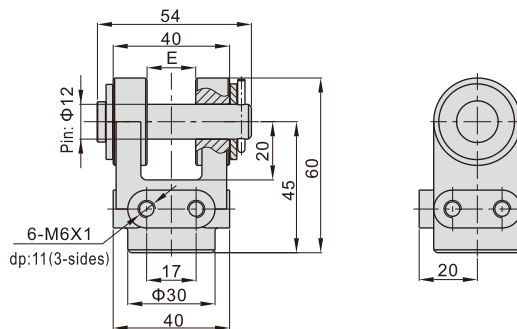

Model	Ordering code	Applicable bore size	E
MCKA	MCKA50-Y	40\50\63	16.5
MCKB	MCKB50-Y	40\50\63	19.5

Φ80

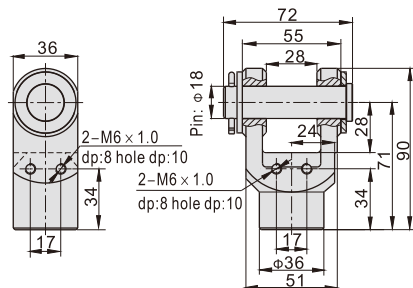

Model	Ordering code	Applicable bore size
MCK	MCK80-Y	80