


➤ Right Angle Pulse Jet Valve

- Introduction of advanced international technology and make some improvements
- Pulse Valve used for controlling the compressed air of dust remover filter system
- The key components adopt advanced material
- Pneumatic control type, solenoid control type and Ex-proof solenoid control type for optional
- Female thread connection port, it is easy for installing





Ordering Code

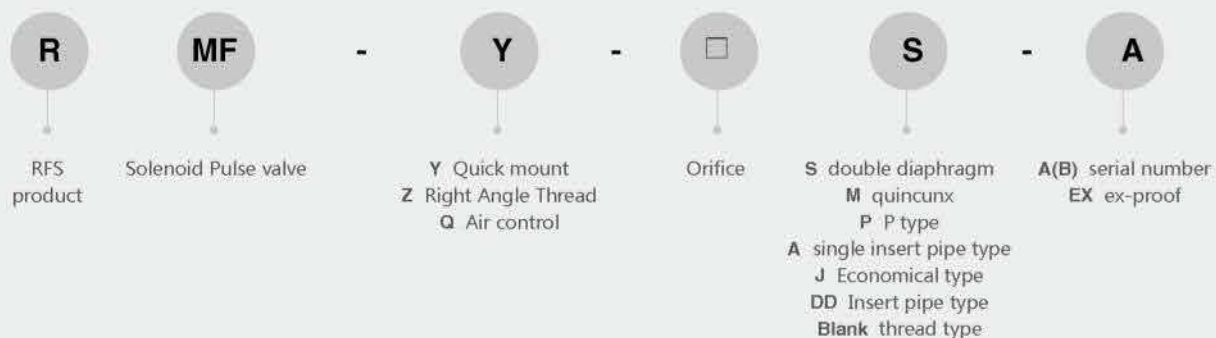

Parameters



Model	Working pressure	Ambient Temp.	Relative Humidity	Media	Voltage	Power	Diaphragm Life	Orifice	Connection ports
RMF-Z-15M	0.3 ~ 0.8MPa	-5~55° C	< 85%	Clean Air	AC110V AC220V DC24V ±10%	DC20W AC25VA	Over one Million cycles	Φ15mm	G1/2"
RMF-Z-20M								Φ20mm	G3/4"
RMF-Z-20J						DC12W AC15VA		Φ20mm	G3/4"
RMF-Z-25J								Φ25mm	G1"
RMF-Z-20A								Φ20mm	G3/4"
RMF-Z-20P						DC20W AC25VA		Φ20mm	G3/4"
RMF-Z-25P								Φ25mm	G1"
RMF-Z-20						DC21W AC18VA		Φ20mm	G3/4"
RMF-Z-25								Φ25mm	G1
RMF-Z-35P						DC20W/AC25VA		Φ35mm	G1 ¹ /2"
RMF-Z-40S						DC30W/AC28VA		Φ40mm	G1 ¹ /2"
RMF-Z-45P								Φ45mm	G1 ¹ /2"
RMF-Z-50S						DC20W/AC25VA		Φ50mm	G2"
RMF-Z-50S-A						DC30W/AC28VA		Φ50mm	G2"
RMF-Z-62S						DC20W/AC25VA		Φ62mm	G2 ¹ /2"
RMF-Z-62S-A						DC30W/AC28VA		Φ62mm	G2 ¹ /2"
RMF-Z-76S						DC20W AC25VA		Φ76mm	G3"
RMF-25DD								Φ25mm	Φ35
RMF-45DD								Φ40mm	Φ50

Right Angle Solenoid Pulse Valve

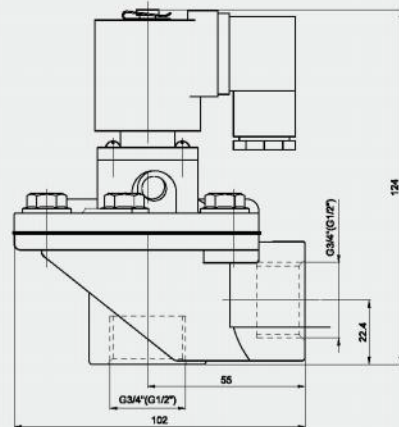


Model	RMF-Z-15M	RMF-Z-20M
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	φ 15	φ 20
Connection Port	G1/8"	G3/4"

Right Angle Solenoid Pulse Valve

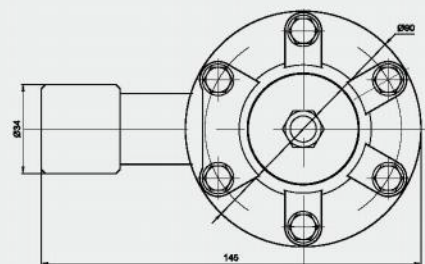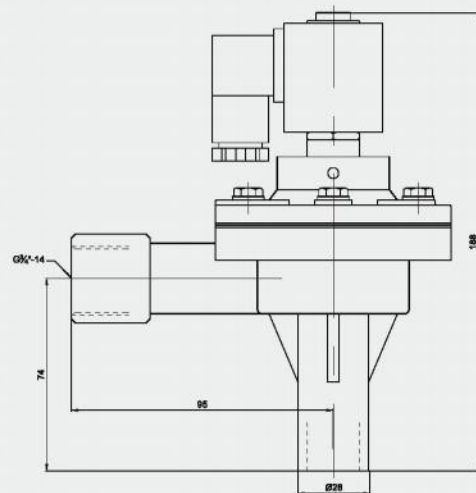


Model	RMF-Z-20A
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 20
Connection Port	G3/4"

Right Angle Solenoid Pulse Valve

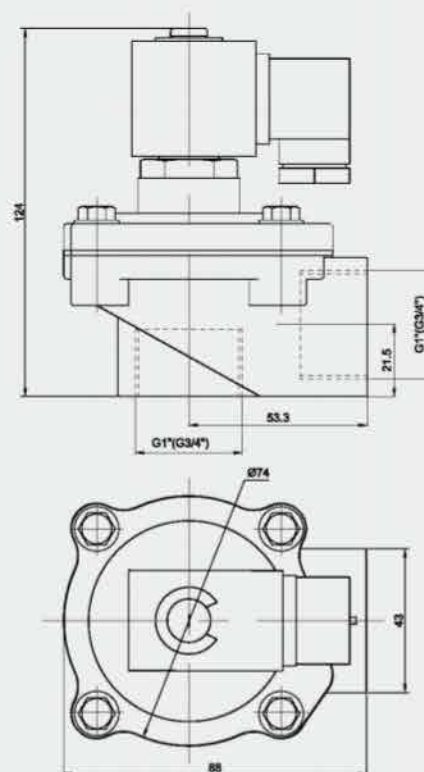


Model	RMF-Z-20J	RMF-Z-25J
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	φ 20	φ 25
Connection Port	G3/4"	G1"

Right Angle Solenoid Pulse Valve

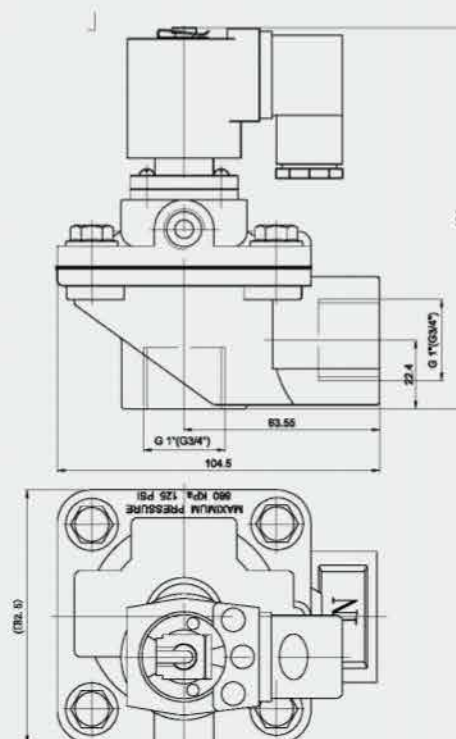


Model	RMF-Z-25P	RMF-Z-20P
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	φ 25	φ 20
Connection Port	G1"	G3/4"

Right Angle Solenoid Pulse Valve

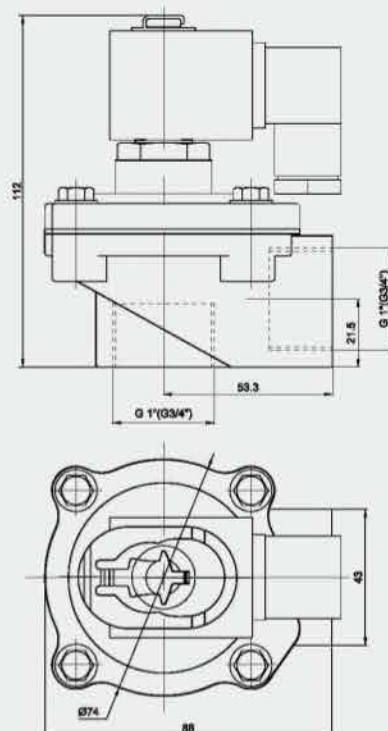


Model	RMF-Z-25	RMF-Z-20
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	ϕ 25	ϕ 20
Connection Port	G1"	G3/4"

Right Angle Solenoid Pulse Valve

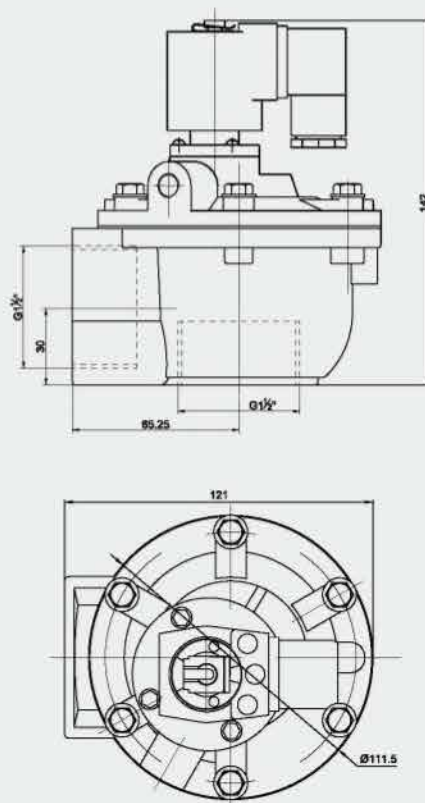


Model	RMF-Z-35P
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	ϕ 35
Connection Port	G1-1/2"

Right Angle Solenoid Pulse Valve

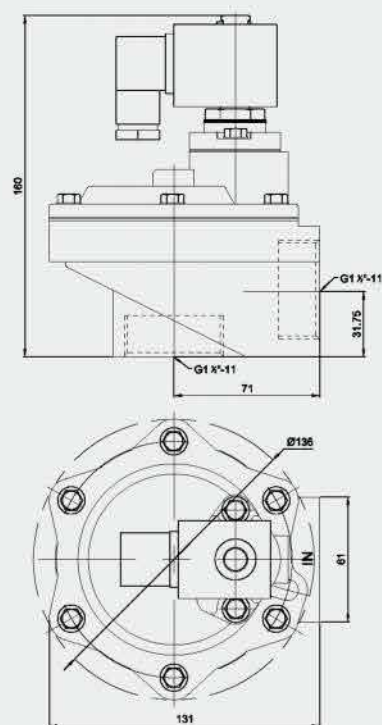



Model	RMF-Z-40S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 40
Connection Port	G1 1/2"

Right Angle Solenoid Pulse Valve

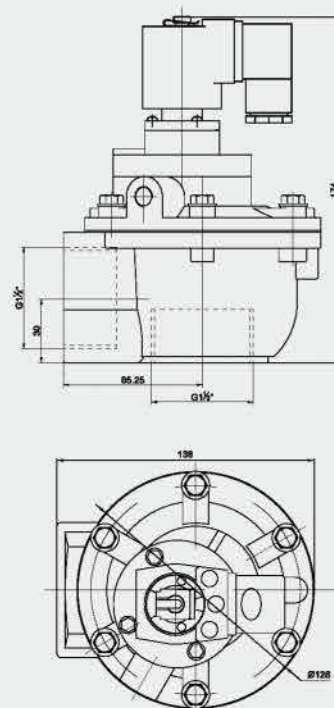



Model	RMF-Z-45P
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 45
Connection Port	G1 1/2"

Right Angle Solenoid Pulse Valve

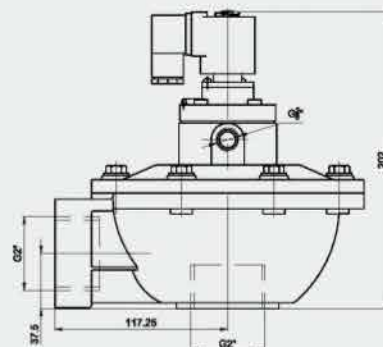


Model	RMF-Z-50S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 50
Connection Port	G2"

Right Angle Solenoid Pulse Valve

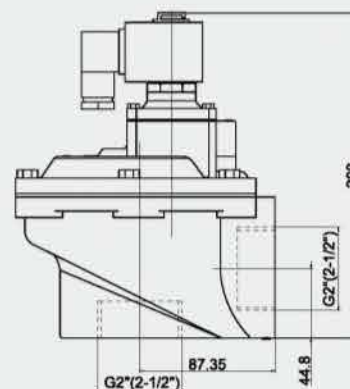


Model	RMF-Z-50S-A	RMF-Z-62S-A
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	φ 50	φ 62
Connection Port	G2"	G2-1/2"

Right Angle Solenoid Pulse Valve

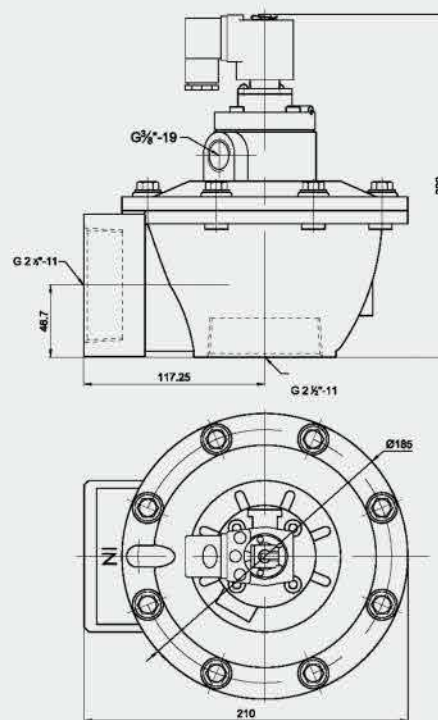

Model	RMF-Z-62S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 62
Connection Port	G2-1/2"

Right Angle Solenoid Pulse Valve

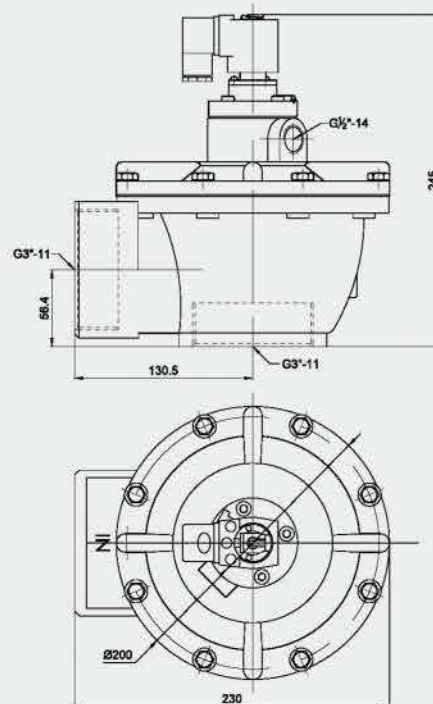


Model	RMF-Z-76S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 76
Connection Port	G3"

Right Angle (DD Type) Solenoid Pulse Valve




Model	RMF-25DD
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 25
Connection Port	φ 35

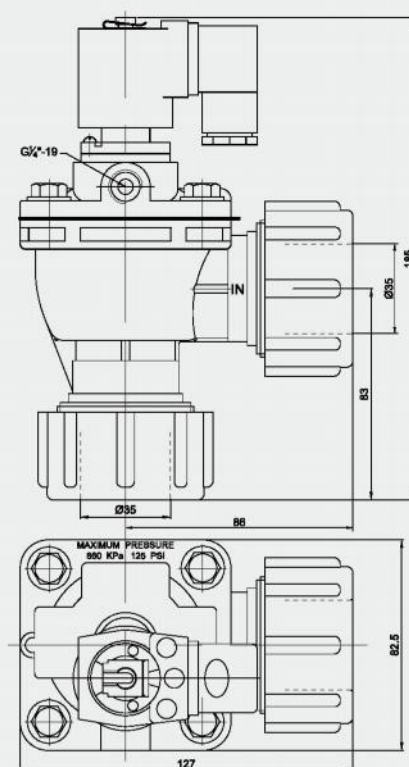

Right Angle (DD Type) Solenoid Pulse Valve



Model	RMF-45DD
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 40
Connection Port	φ 50

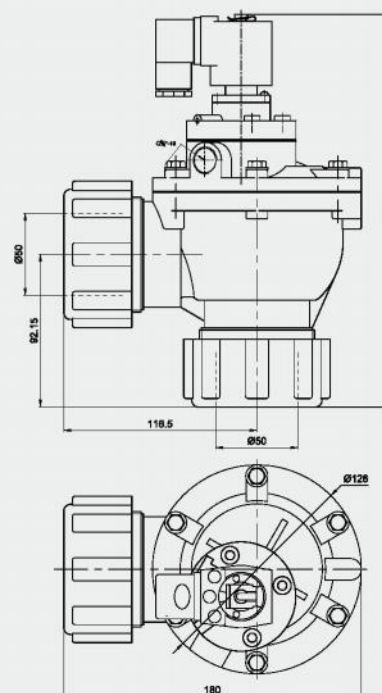



➤ Quick Mount Pulse Solenoid Valve



Parameters



Model	Working pressure	Ambient Temp.	Relative Humidity	Media	Voltage	Power	Diaphragm Life	Orifice	Connection ports
RMF-Y-25	0.3 ~ 0.8MPa	-5~55° C	< 85%	Clean Air	AC110V AC220V DC24V ±10%	DC12W/AC15VA	Over one Million cycles	Φ25mm	G1°
RMF-Y-40						DC20W AC25VA		Φ45mm	G1 ¹ /2°
RMF-Y-50S								Φ50mm	Φ62.5mm
RMF-Y-62S								Φ62mm	Φ76mm
RMF-Y-76S								Φ76mm	Φ86mm
RMF-Y-76S-A1								Φ75mm	Φ88mm
RMF-Y-86S						DC20W/AC25VA		Φ76mm	Φ90mm

Solenoid Pulse Valve

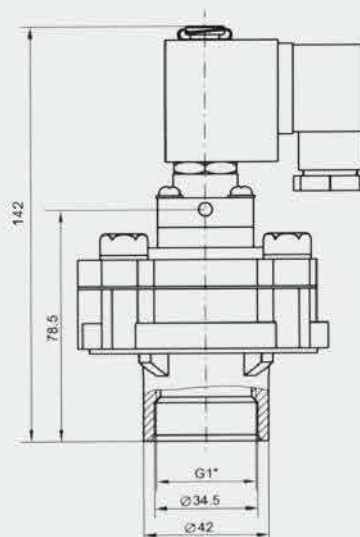




Model	RMF-Y-25
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	$\varnothing 25$
Connection Port	$\varnothing 42$

Solenoid Pulse Valve

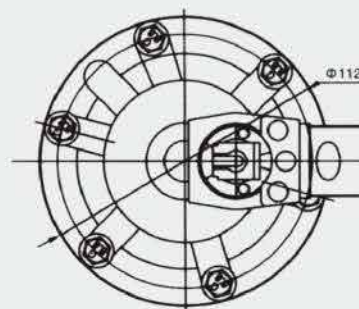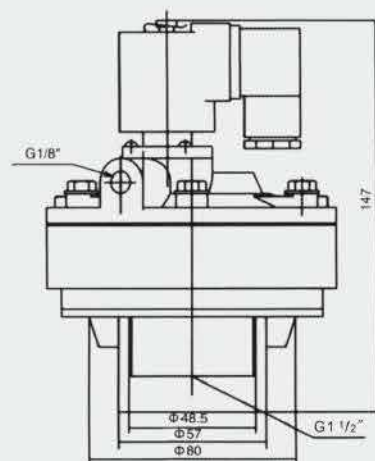




Model	RMF-Y-40
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	$\varnothing 45$
Connection Port	$\varnothing 50$

Solenoid Pulse Valve

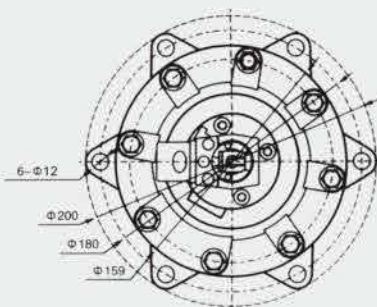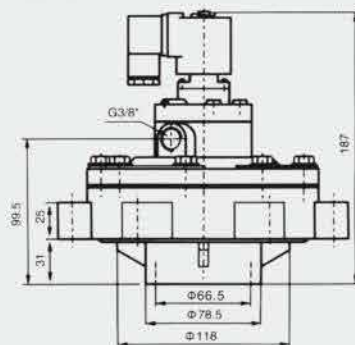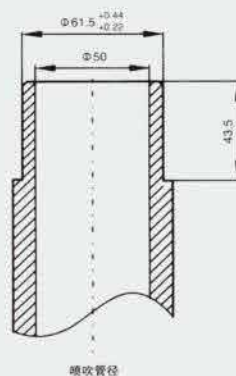


Model	RMF-Y-50S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	$\phi 50$
Connection Port	$\phi 65$

Solenoid Pulse Valve

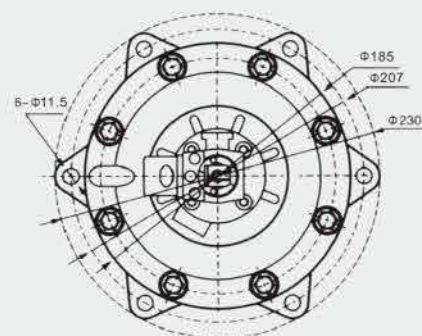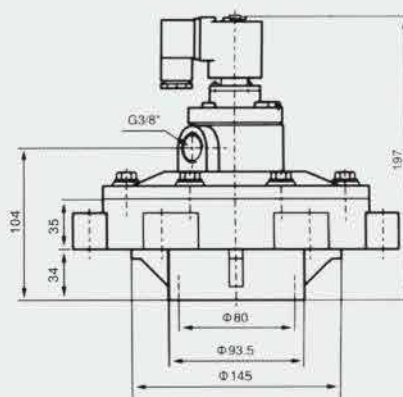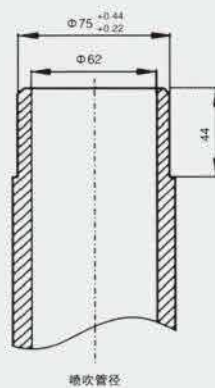


Model	RMF-Y-62S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	$\phi 62$
Connection Port	$\phi 80$


Solenoid Pulse Valve

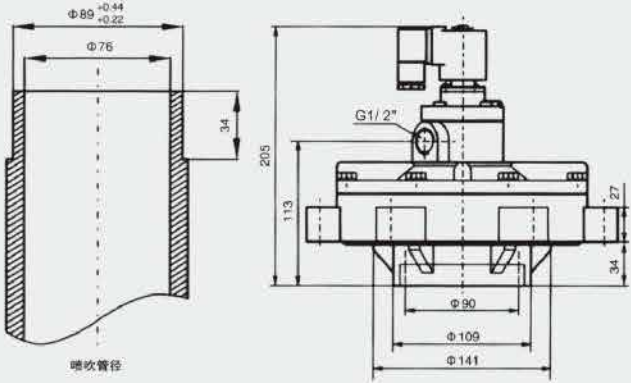


Model	RMF-Y-76S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	ϕ 76
Connection Port	ϕ 90

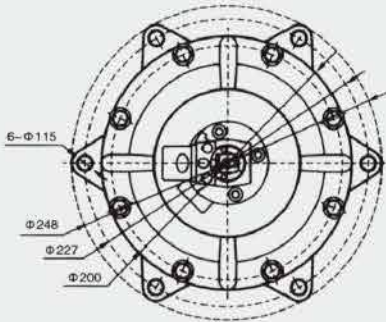




Solenoid Pulse Valve

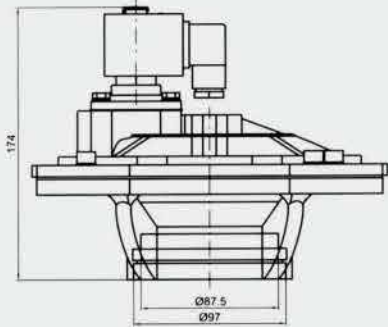

Model	RMF-Y-76S-A1
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	ϕ 76
Connection Port	ϕ 89

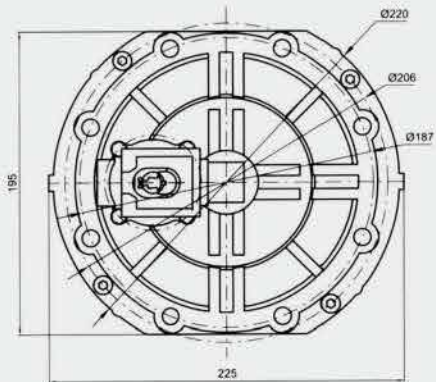

Solenoid Pulse Valve

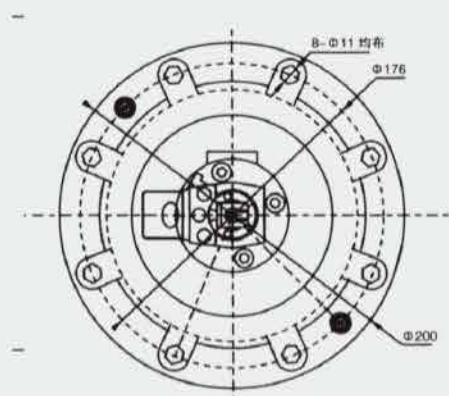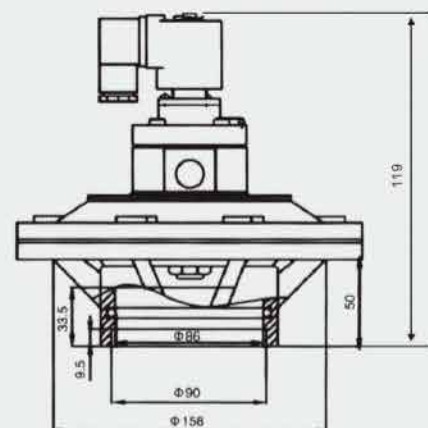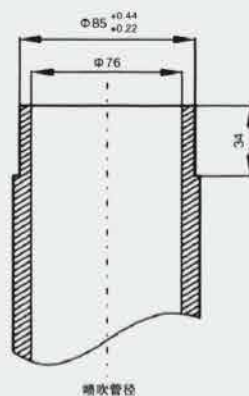

Model	RMF-Y-86S
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55℃
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	$\phi 80$
Connection Port	$\phi 90$



> Air Control Pulse Jet Valve



Parameters



Model	Working pressure	Ambient Temp	Relative Humidity	Media	Diaphragm Life	Orifice	Connection ports
RMF-Q-25DD	0.3 ~ 0.8MPa	-5 ~ 55°C	< 85%	Clean Air	Over one Million cycles	Φ25	Φ35
RMF-Q-45DD						Φ45	Φ50
RMF-Q-20P						Φ20	G3/4"
RMF-Q-25P						Φ25	G1"
RMF-ZQ-45P						Φ45	G1-1/2"
RMF-ZQ-50S						Φ50	G2"
RMF-ZQ-62S						Φ62	G2-1/2"
RMF-ZQ-76S						Φ76	G3"
RMF-YQ-50S						Φ50	Φ62.5
RMF-YQ-62S						Φ62	Φ76
RMF-YQ-76S						Φ76	Φ90

Right Angle (DD type) Air Control Pulse Valve

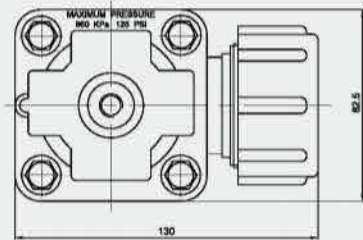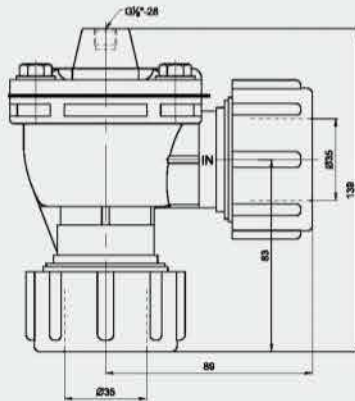



Model	RMF-Q-25DD
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 25
Connection Port	φ 35

Right Angle (DD type) Air Control Pulse Valve

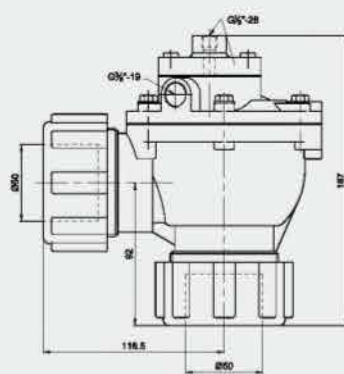


Model	RMF-Q-45DD
Working-pressure	0.3 ~ 0.8MPa
Ambient Temperature	-5 ~ 55°C
Relative Humidity	< 85%
Working Medium	Clean Air
Voltage	AC110V / AC220V / DC24V
Diaphragm Life	Over One Million Cycles
Orifice	φ 45
Connection Port	φ 50

Right Angle Air Control Pulse Valve

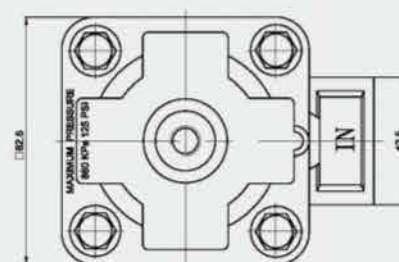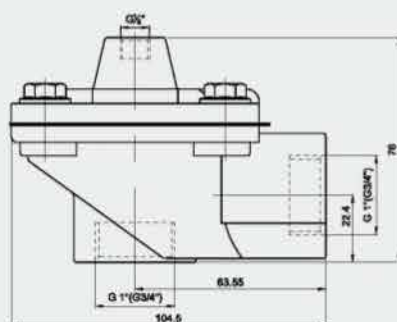


Model	RMF-Q-25P	RMF-Q-20P
Working-pressure	0.3 ~ 0.8MPa	
Ambient Temperature	-5 ~ 55°C	
Relative Humidity	< 85%	
Working Medium	Clean Air	
Voltage	AC110V / AC220V / DC24V	
Diaphragm Life	Over One Million Cycles	
Orifice	φ 25	φ 20
Connection Port	G1"	G3/4"

Right Angle Air Control Pulse Valve

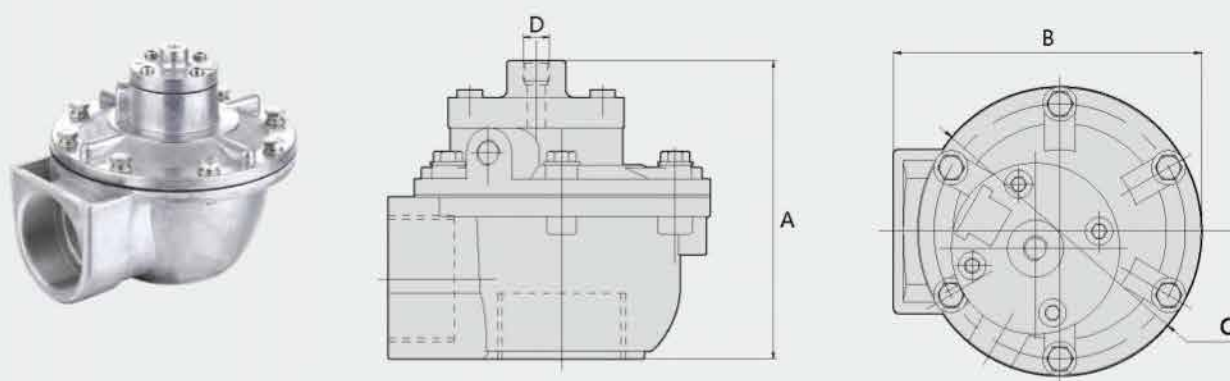

Model	A	B	C	D
RMF-ZQ-45P	125	138	Φ126	G1/8"
RMF-ZQ-50s	153	205	Φ184	G1/8"
RMF-ZQ-62s	173	210	Φ185	G1/8"
RMF-ZQ-76s	195	230	Φ200	G1/8"

In Line Gas control Pulse valve

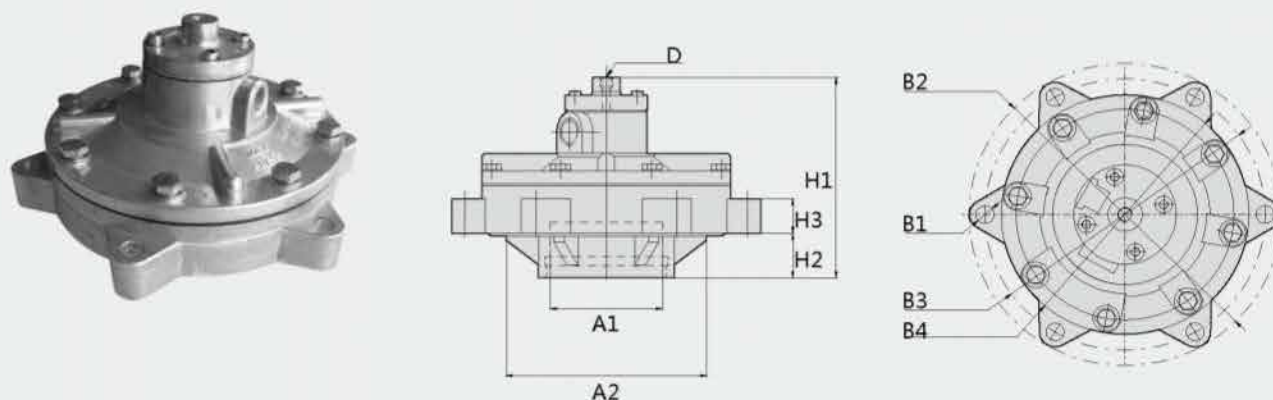

Model	A1	A2	B1	B2	B3	B4	H1	H2	H3	D
RMF-YQ-50S	Φ62.5	Φ118	6-Φ12	Φ200	Φ180	Φ159	138	30.5	34.5	G1/8"
RMF-YQ-62S	Φ76	Φ143.5	6-Φ11.5	Φ230	Φ207	Φ185	148	34	35	
RMF-YQ-76S	Φ90	Φ141	6-Φ12	Φ248	Φ277	Φ200	156	34.5	27	

➤ Explosion-proof Pulse Jet Valve

- Ex class: ExmI/II T4
- Using our own Explosion-proof coil, All the solenoid pulse valves can be changed into Ex-proof style
- Voltage & wire length can be made as your request
- When you order Ex-proof solenoid valve, Add "Ex" after model



Parameters

Model	Working pressure	Ambient Temp.	Relative Humidity	Media	Voltage	Power	Orifice	Connection ports
RMF-25DD-EX	0.3 ~ 0.8MPa	-5~55° C	< 85%	Clean Air	AC110V AC220V DC24V DC12V ±10%	DC15W AC13VA	Φ25mm	Φ31mm
RMF-45DD-EX							Φ40mm	Φ50mm
RMF-Z-25J-EX						DC11W AC13VA	Φ25mm	G1"
RMF-Z-20J-EX							Φ20mm	G3/4"
RMF-Z-20M-EX						DC15W AC13VA	Φ20mm	G3/4"
RMF-Z-15M-EX							Φ15mm	G1/2"
RMF-Z-20A-EX						DC11W/AC13VA	Φ20mm	G3/4"
RMF-Z-20P-EX							Φ20mm	G3/4"
RMF-Z-25P-EX						DC15W AC13VA	Φ25mm	G1"
RMF-Z-35P-EX							Φ35mm	G1 1/2"
RMF-Z-40S-EX						DC13W/AC23VA	Φ40mm	G1 1/2"
RMF-Z-45P-EX							Φ45mm	G1 1/2"
RMF-Z-50S-EX						DC15W/AC13VA	Φ50mm	G2"
RMF-Z-62S-EX							Φ62mm	G2 1/2"
RMF-Z-76S-EX							Φ76mm	G3"
RMF-Y-40S-EX						DC13W/AC23VA	Φ45mm	G1 1/2"
RMF-Y-50S-EX							Φ50mm	Φ62.5mm
RMF-Y-62S-EX						DC15W AC13VA	Φ62mm	Φ76mm
RMF-Y-76S-EX							Φ76mm	Φ90mm



➤ Pulse signal controller & parts

Sequential controller is main control part of bag filter system. It controls the on/off of pulse solenoid valves sequentially, so circularly the air runs in the bag and shakes off the dust which adsorbs on bag surface, make the bag keep clean and sufficient air permeability.



Pulse signal controller


PIC-series Pulse Signal Controller




Model	PIC-20AL	PIC-20DL	PIC-28AL	PIC-28DL
Input voltage	220VAC ±10% 50Hz/60Hz			
Output voltage	220VAC	24VDC	220VAC	24VDC
Output current	1.5A Max			
Pulse width	(1-9999)*0.01sec			
Pulse interval	(1-9999)*1sec			
Cycle interval	(1-9999)*1sec			
Output lines	(1-20)*1line		(1-28)*1line	
Working environment	-10~70℃			
Working humidity	35~90%RH			
Weight	Approx 1.5Kg			
Dimension	260mm*180mm*110mm			

On-line operation mode

1.mode of connection

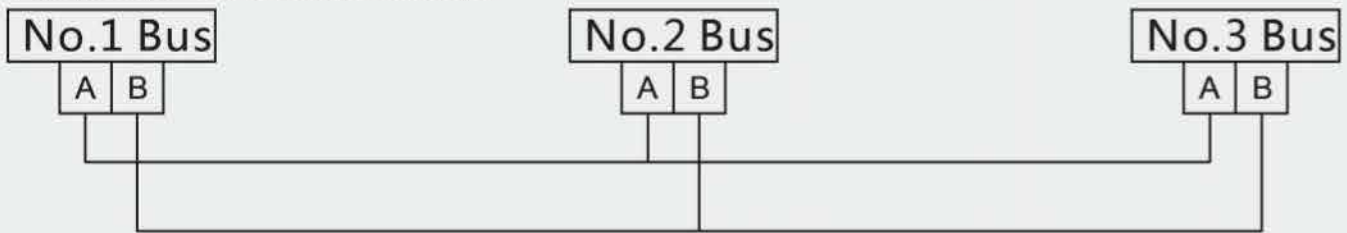


2.setting mode

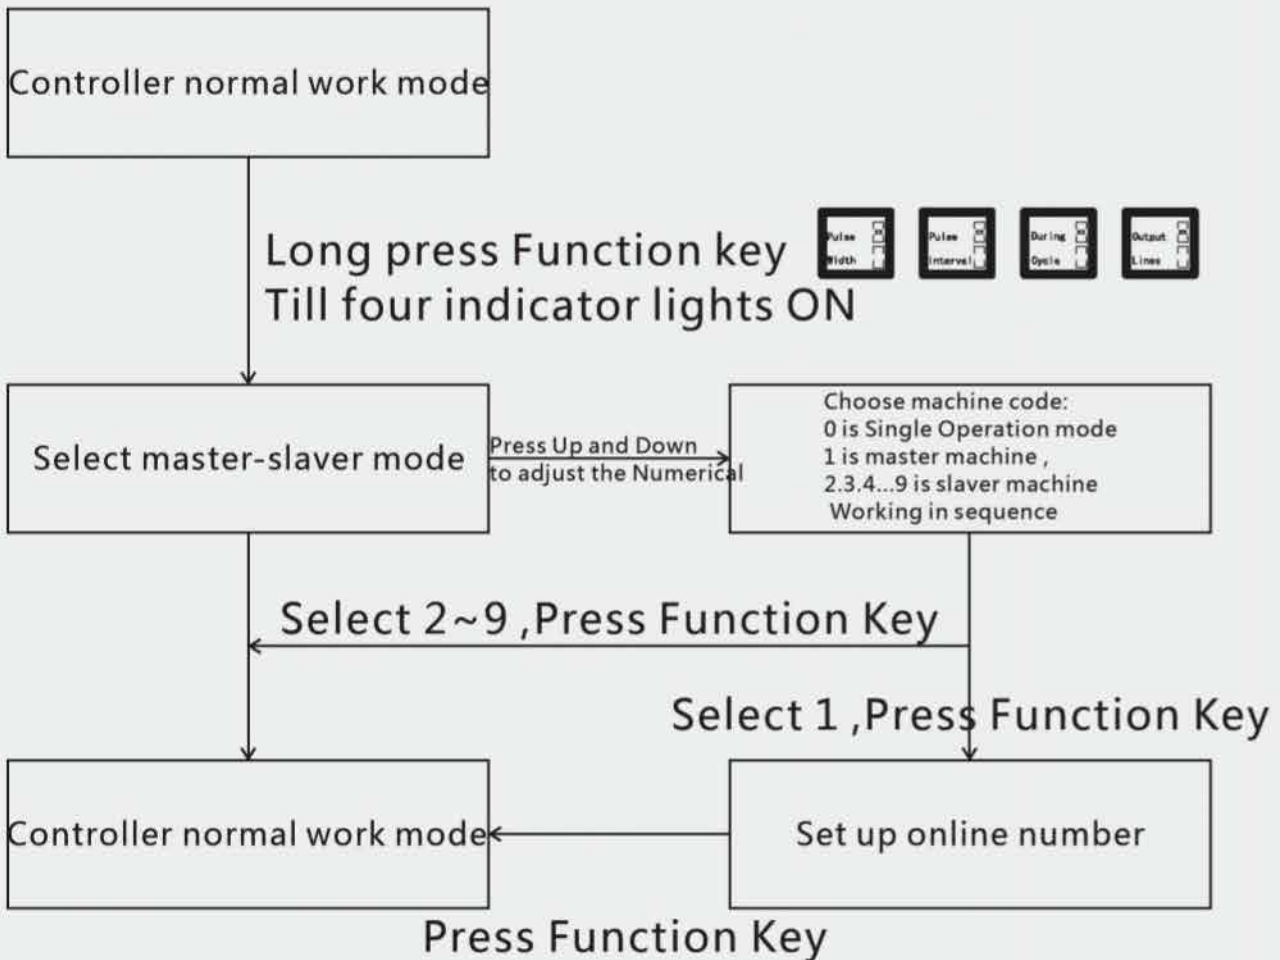

Attention

1. On-line operation mode will be allowed maximum of 9 Controller series connection .Total 180 output lines
2. On-line Number must be equal to setting number of master machine ,Otherwise There will be a system exception
3. Slaver Machine must arrange in order ,There should not appear hop count situation


RB CONNECTION

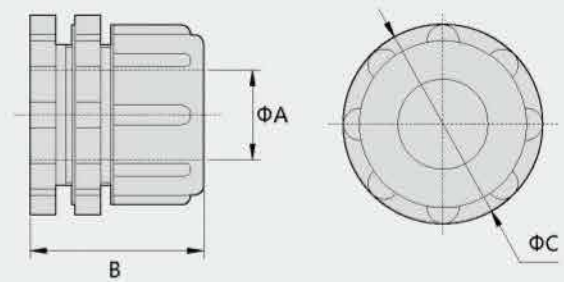

Overall dimension

Model	symbol	A	B	C
RB-25		35	67.5	77.5
RB-40		50	92.5	92

Plastic Venturi Tube

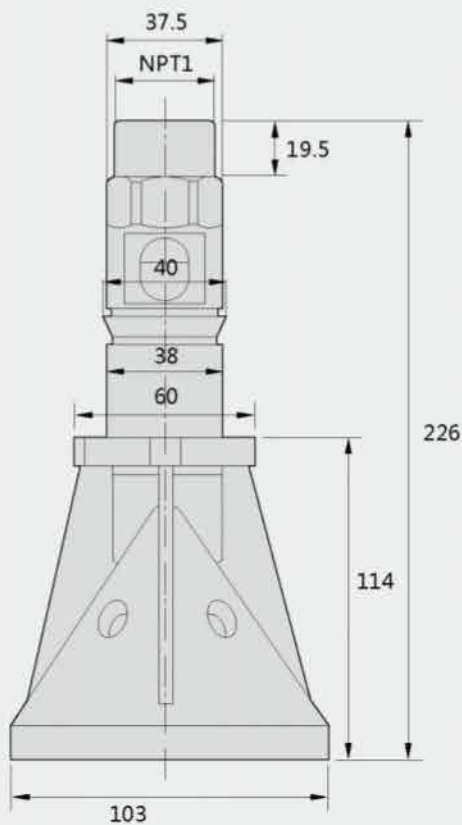

Diaphragm

Diaphragm is the one of the most important components in pulse valve, our diaphragm is made from import material.

It has good antifatigue, ageing resistance etc. We offer better quality than others in this field. We also offer special diaphragms as per customer's request.

