



Compact cylinder—ACE Series


In accordance with ISO21287 standard

Compendium of ACE Series

In accordance with ISO21287 standard

In accordance with ISO21287 standard, the mounting size is vague.

Two kinds of rod type




Female thread Male thread

Magnetic switch slots around the cylinder body

There are magnetic switch slots around the cylinder body convenient to install inducting switch.

Multi-mounting accessories

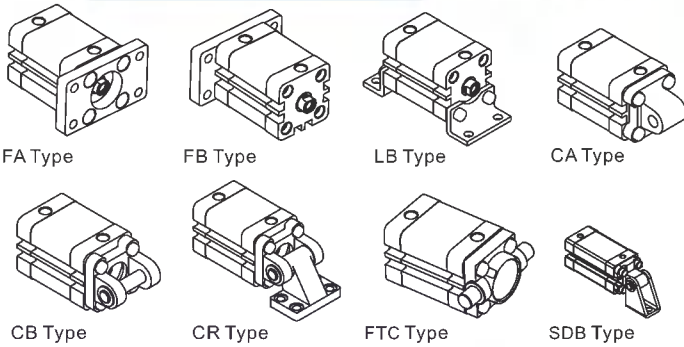

Multi-type cylinder

| | |
|---|--|
| ACE: Compact cylinder (Double acting) | |
| ASE: Compact cylinder (Single acting-push) | |
| ATE: Compact cylinder (Single acting-pull) | |
| ACED: Compact cylinder (Double rod) | |
| ACEJ: Compact cylinder (Adjustable stroke) | |
| TACE: Compact cylinder (Double acting non-rotating with yoke) | |
| TACED: Compact cylinder (Double rod non-rotating with yoke) | |

Compact structure

Compact structure can effectively save fifty percent installation space with ISO15552 standard cylinder.

Eleven bore size are available

Bore size: 12, 16, 20, 25, 32, 40, 50, 63, 80, 100, 125

Criteria for selection: Cylinder thrust

Unit: Newton(N)

| Bore size | Rod size | Acting type | Pressure area(mm ²) | Operating pressure(MPa) | | | | | | | Bore size | Rod size | Acting type | Pressure area(mm ²) | Operating pressure(MPa) | | | | | | | | |
|-----------|----------|---------------|---------------------------------|-------------------------|--------|--------|--------|--------|--------|--------|-----------|----------|-------------|---------------------------------|-------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | 0.7 | | | | | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | 0.7 | | |
| 12 | 6 | Single acting | Push side | 113.1 | - | 6.1 | 17.4 | 28.7 | 40.0 | 51.4 | 62.7 | 40 | 12 | Single acting | Push side | 1256.6 | 54.2 | 179.8 | 305.5 | 431.2 | 556.8 | 682.5 | 808.1 |
| | | | Pull side | 84.8 | - | 0.5 | 8.9 | 17.4 | 25.9 | 34.4 | 42.9 | | | | 1143.5 | 42.9 | 157.2 | 271.6 | 385.9 | 500.3 | 614.6 | 729.0 | |
| | | Double acting | Push side | 113.1 | 11.3 | 22.6 | 33.9 | 45.2 | 56.5 | 67.9 | 79.2 | | | 1256.6 | 125.7 | 251.3 | 377.0 | 502.7 | 628.3 | 754.0 | 879.6 | | |
| | | | Pull side | 84.8 | 8.5 | 17.0 | 25.4 | 33.9 | 42.4 | 50.9 | 59.4 | | | 1143.5 | 114.4 | 228.7 | 343.1 | 457.4 | 571.8 | 686.1 | 800.5 | | |
| 16 | 8 | Single acting | Push side | 201.1 | - | 18.1 | 38.2 | 58.3 | 78.4 | 98.5 | 118.6 | 50 | 16 | Single acting | Push side | 1963.5 | 90.1 | 286.5 | 482.8 | 679.2 | 875.5 | 1071.9 | 1268.2 |
| | | | Pull side | 150.8 | - | 8.1 | 23.1 | 38.2 | 53.3 | 68.4 | 83.5 | | | | 1762.4 | 70.0 | 246.3 | 422.5 | 598.8 | 775.0 | 951.3 | 1127.5 | |
| | | Double acting | Push side | 201.1 | 20.1 | 40.2 | 60.3 | 80.4 | 100.5 | 120.6 | 140.7 | | | 1963.5 | 196.3 | 392.7 | 589.0 | 785.4 | 981.7 | 1178.1 | 1374.4 | | |
| | | | Pull side | 150.8 | 15.1 | 30.2 | 45.2 | 60.3 | 75.4 | 90.5 | 105.6 | | | 1762.4 | 176.2 | 352.5 | 528.7 | 705.0 | 881.2 | 1057.5 | 1233.7 | | |
| 20 | 10 | Single acting | Push side | 314.2 | - | 33.1 | 64.5 | 96.0 | 127.4 | 158.8 | 190.2 | 63 | 16 | Single acting | Push side | 3117.2 | 173.6 | 485.3 | 797.1 | 1108.8 | 1420.5 | 1732.2 | 2044.0 |
| | | | Pull side | 235.6 | - | 17.4 | 41.0 | 64.5 | 88.1 | 111.7 | 135.2 | | | | 2916.2 | 153.5 | 445.1 | 736.8 | 1028.4 | 1320.0 | 1611.6 | 1903.2 | |
| | | Double acting | Push side | 314.2 | 31.4 | 62.8 | 94.2 | 125.7 | 157.1 | 188.5 | 219.9 | | | 3117.2 | 311.7 | 623.4 | 935.2 | 1246.9 | 1558.6 | 1870.3 | 2182.1 | | |
| | | | Pull side | 235.6 | 23.6 | 47.1 | 70.7 | 94.2 | 117.8 | 141.4 | 164.9 | | | 2916.2 | 291.6 | 583.2 | 874.9 | 1166.5 | 1458.1 | 1749.7 | 2041.3 | | |
| 25 | 10 | Single acting | Push side | 490.9 | 13.8 | 62.9 | 112.0 | 161.0 | 210.1 | 259.2 | 308.3 | 80 | 20 | Single acting | Push side | 5026.5 | 305.6 | 808.2 | 1310.9 | 1813.5 | 2316.2 | 2818.8 | 3321.5 |
| | | | Pull side | 412.3 | 5.9 | 47.2 | 88.4 | 129.6 | 170.9 | 212.1 | 253.3 | | | | 4712.4 | 274.1 | 745.4 | 1216.6 | 1687.9 | 2159.1 | 2630.3 | 3101.6 | |
| | | Double acting | Push side | 490.9 | 49.1 | 98.2 | 147.3 | 196.3 | 245.4 | 294.5 | 343.6 | | | 5026.5 | 502.7 | 1005.3 | 1508.0 | 2010.6 | 2513.3 | 3015.9 | 3518.6 | | |
| | | | Pull side | 412.3 | 41.2 | 82.5 | 123.7 | 164.9 | 206.2 | 247.4 | 288.6 | | | 4712.4 | 471.2 | 942.5 | 1413.7 | 1885.0 | 2356.2 | 2827.4 | 3298.7 | | |
| 32 | 12 | Single acting | Push side | 804.2 | 30.8 | 111.2 | 191.7 | 272.1 | 352.5 | 432.9 | 513.4 | 100 | 20 | Single acting | Push side | 7854.0 | 499.1 | 1284.5 | 2069.9 | 2855.3 | 3640.7 | 4426.1 | 5211.5 |
| | | | Pull side | 691.2 | 19.5 | 88.6 | 157.7 | 226.9 | 296.0 | 365.1 | 434.2 | | | | 7539.8 | 467.7 | 1221.7 | 1975.7 | 2729.6 | 3483.6 | 4237.6 | 4991.6 | |
| | | Double acting | Push side | 804.2 | 80.4 | 160.8 | 241.3 | 321.7 | 402.1 | 482.5 | 563.0 | | | 7854.0 | 785.4 | 1570.8 | 2356.2 | 3141.6 | 3927.0 | 4712.4 | 5497.8 | | |
| | | | Pull side | 691.2 | 69.1 | 138.2 | 207.3 | 276.5 | 345.6 | 414.7 | 483.8 | | | 7539.8 | 754.0 | 1508.0 | 2262.0 | 3015.9 | 3769.9 | 4523.9 | 5277.9 | | |
| 125 | 25 | Double acting | Push side | 12271.8 | 1227.2 | 2454.4 | 3681.5 | 4908.7 | 6135.9 | 7363.1 | 8590.3 | 11780.9 | 1178.1 | 2356.2 | 3534.3 | 4712.4 | 5890.5 | 7086.5 | 8246.6 | | | | |
| | | | Pull side | 11780.9 | 1178.1 | 2356.2 | 3534.3 | 4712.4 | 5890.5 | 7086.5 | 8246.6 | | | | | | | | | | | | |

Installation and application



- When load changes in the work, the cylinder with abundant output capacity shall be selected.
- Relative cylinder with high temperature resistance or corrosion resistance shall be chosen under the condition of high temperature or corrosion.
- Necessary protection measure shall be taken in the environment with higher humidity, much dust or water drops, oil dust and welding dregs.
- Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of particles into the cylinder.
- The medium used by cylinder shall be filtered to 40µm or below.
- As both of the front cover and piston of the cylinder are short, typically too large stroke can not be selected.
- Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
- The cylinder shall avoid the influence of side load in operation to maintain the normal work of cylinder and extend the service life.
- If the cylinder is dismantled and stored for a long time, please conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports. The front and back cover can not be dismantled, which shall be especially noticed.




Compact cylinder

ACE Series




Symbol

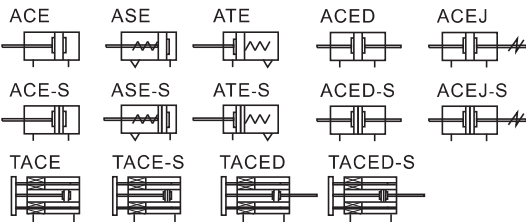

Product feature

- In accordance with ISO21287 standard, the mounting size is vogue.
- The cylinder body connects with the threads of the front and back cover, forming high strength and convenient maintenance.
- The internal diameter of the body is treated with rolling followed by the treatment of hard anodizing, forming an excellent abrasion resistance and durability.
- The seal of piston adopts heterogeneous two-way seal structure. It has compact dimension and the function of oil reservation.
- Compact structure can effectively save fifty percent installation space with ISO15552 standard cylinder.
- There are magnetic switch slots around the cylinder body, which is convenient to install inducting switch.
- Bumper is available and it can availably absorb excrement energy.
- Installing accessories with various specifications are optional.

Ordering code

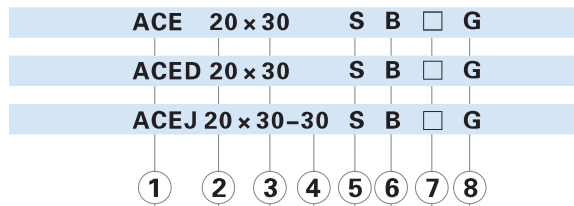

| ① Model | ② Bore size | ③ Stroke | ④ Adjustable Stroke | ⑤ Magnet | ⑥ Rod type | ⑦ Mounting type [Note1] | ⑧ Thread type[Note2] |
|---|---------------------------------------|-----------------------------------|---------------------|---|---|---|----------------------|
| ACE: Compact cylinder (Double acting) | 12 16 20 25 32 40 50 63 80 100 125 | Refer to stroke table for details | No this code | Blank: Without magnet S: With magnet | Blank: Female thread B: Male thread | Blank: No accessories FA: FA type FB: FB type CA: CA type CB: CB type | G: G Thread |
| ASE: Compact cylinder (Single acting-push) | 12 16 20 25 32 40 50 63 80 100 | | | | | CR: CR type FTC: FTC type LB: LB type SDB: SDB type | |
| ATE: Compact cylinder (Single acting-pull) | | | | | Blank: No accessories FB: FB type CA: CA type | CB: CB type CR: CR type FTC: FTC type | |
| TACE: Compact cylinder (Double acting non-rotating with yoke) | Blank: No accessories FB: FB type | | | | | | |
| TACED: Compact cylinder (Double rod non-rotating with yoke) | | | | | Blank: Female thread B: Male thread | Blank: No accessories FA: FA type FTC: FTC type LB: LB type | |
| ACED: Compact cylinder (Double rod) | 10 20 30 40 50 75 100 | | | | | | |
| ACEJ: Compact cylinder (Adjustable stroke) | | | | | | | |

[Note1] Please refer to page 304-306 for accessory parts; CR must be used with CB, SDB must be used with CA, FTC must be used with TCM2.

[Note2] Standard thread is blank here.

Specification

| Bore size(mm) | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 | 125 |
|--------------------|---|----|------------------------|----|----|---|----|------|----|------|-----|
| Acting type | Double acting | | | | | | | | | | |
| | Single acting_Push type、Single acting_Pull type | | | | | | | | | | - |
| Fluid | Air(to be filtered by 40μm filter element) | | | | | | | | | | |
| Operating pressure | Double acting | | 0.15~1.0MPa(22~145psi) | | | | | | | | |
| | Single acting | | 0.2~1.0MPa(28~145psi) | | | | | | | | |
| Proof pressure | 1.5MPa(215psi) | | | | | | | | | | |
| Temperature °C | -20~70 | | | | | | | | | | |
| Speed range mm/s | Double acting: 30~500 | | | | | Single acting: 50~500 | | | | | |
| Stroke tolerance | Stroke≤100 + ₀ ^{+0.0} | | | | | Stroke>100 + ₀ ^{+1.5} | | | | | |
| Cushion type | Bumper | | | | | | | | | | |
| Port size [Note1] | M5×0.8 | | | | | | | 1/8" | | 1/4" | |

[Note1] G thread is available.
Add) Refer to P528 for detail of sensor switch.

Stroke

| Bore size (mm) | Standard stroke (mm) | | | | | | | | | | | | | | | | | Max.stroke | | | | | | | | | | | | |
|------------------------|----------------------|---------------|---------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Common type | Double acting | 12 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | | | | | | | 50 | | | | | | | | | | | |
| | | 16 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | | | 75 | | | | | | | | | | | |
| | | 20 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | | | |
| | | 25 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | 110 | 120 | 125 | 150 | | | | | | | |
| | | 32 40 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | 110 | 120 | 125 | 150 | 160 | 175 | 200 | | | | |
| Non-rotating with yoke | Double acting | 50 63 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | 110 | 120 | 125 | 150 | 160 | 175 | 200 | 225 | 250 | 250 | |
| | | 80 100 125 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | 110 | 120 | 125 | 150 | 160 | 175 | 200 | 225 | 250 | 275 | 300 |
| | | Single acting | 12 | 5 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | 10 |
| | | | 16~100 | 5 | 10 | 15 | 20 | 25 | | | | | | | | | | | | | | | | | | | | | | 25 |
| | | | Double acting | 12 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | | | | | | | | | | | | | | | | 50 |
| 16 | 5 | | | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | | | | | | | | | | | | 75 | | |
| 20 25 | 5 | 10 | | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | 100 | | | |
| Non-rotating with yoke | Double acting | 32 40 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | 100 | | |
| | | 50 63 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | 100 | | |
| | | 80 100 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | 100 | | |
| | | | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 70 | 75 | 80 | 90 | 100 | | | | | | | | | 100 | | |


Note) 1. Please contact the company for other special strokes.

2. The dimensions of non-std stroke cylinder has the same dimensions as the next longer stroke std. stroke cylinder. e.g. 23mm stroke cylinder has the same dimensions of 25 std. stroke cylinder.

Compact cylinder


ACE Series

Inner structure and material of major parts

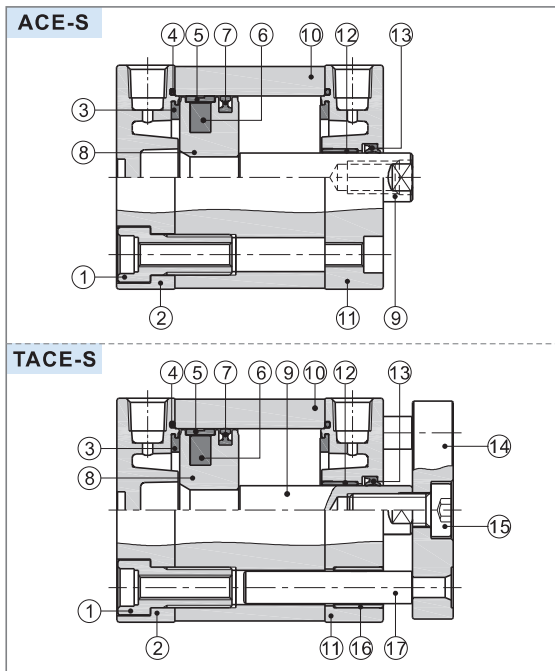

| NO. | Item | Material |
|-----|---------------------|--|
| 1 | Screw | Carbon steel |
| 2 | Back cover | Aluminum alloy |
| 3 | Bumper | TPU |
| 4 | O-ring | NBR |
| 5 | Wear ring | No(Φ12~20)\Wear resistant material(Others) |
| 6 | Magnet | Sintered metal(Neodymium-iron-boron)(Φ12~20)\Plastic(Others) |
| 7 | Piston seal | NBR |
| 8 | Piston | Aluminum alloy |
| 9 | Piston rod | S45C |
| 10 | Body | Aluminum alloy |
| 11 | Front cover | Aluminum alloy |
| 12 | Bushing | No(Φ12~25)\Wear resistant material(Others) |
| 13 | Front cover packing | NBR |
| 14 | Panel | Aluminum alloy |
| 15 | Screw | Carbon steel |
| 16 | Bushing | Wear resistant material |
| 17 | Guide rod | Stainless steel(Φ12~40)\S45C(Others) |

Dimensions

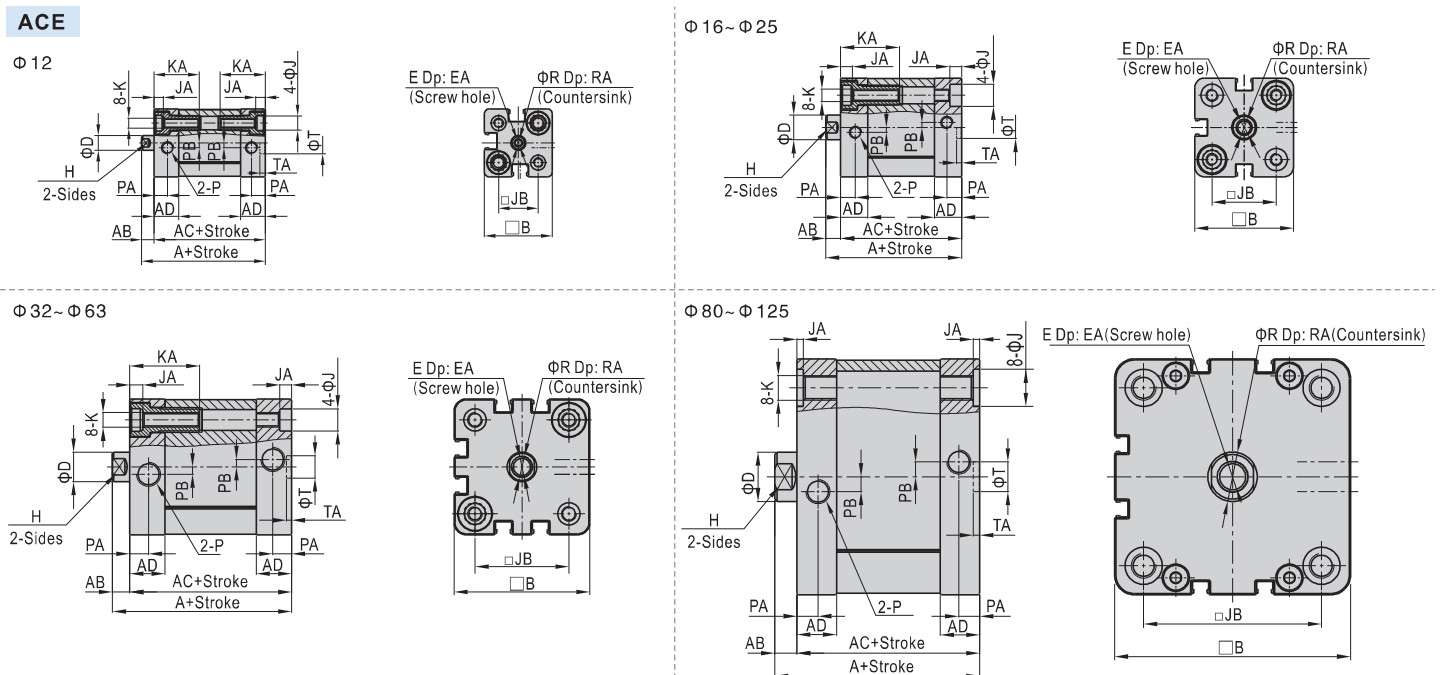

| Bore size\Item | A | AB | AC | AD | B | D | E | EA | H | J | JA | JB | K | KA | P | PA | PB | R | RA | T | TA |
|----------------|------|----|------|------|-------|----|----------|----|----|----|-----|------|----------|------|--------|------|----|------|-----|----|-----|
| 12 | 40 | 5 | 35 | 10 | 27.5 | 6 | M3×0.5 | 8 | 5 | 6 | 3.5 | 16 | M4×0.7 | 18.5 | M5×0.8 | 5.5 | 2 | 3.5 | 1.5 | 9 | 2.1 |
| 16 | 40 | 5 | 35 | 10 | 30 | 8 | M4×0.7 | 10 | 7 | 6 | 3.5 | 18 | M4×0.7 | 18.5 | M5×0.8 | 5.5 | 2 | 4.5 | 1.5 | 9 | 2.1 |
| 20 | 43 | 6 | 37 | 10.5 | 35.5 | 10 | M6×1.0 | 14 | 9 | 9 | 4.5 | 22 | M5×0.8 | 23.5 | M5×0.8 | 6 | 2 | 6.5 | 2.5 | 9 | 2.1 |
| 25 | 45 | 6 | 39 | 11 | 40 | 10 | M6×1.0 | 14 | 9 | 9 | 4.5 | 26 | M5×0.8 | 23.5 | M5×0.8 | 6 | 2 | 6.5 | 2.5 | 9 | 2.1 |
| 32 | 51 | 7 | 44 | 14 | 49.5 | 12 | M8×1.25 | 16 | 10 | 9 | 4.5 | 32.5 | M6×1.0 | 28.5 | G1/8 | 7.5 | 3 | 8.5 | 3.5 | 9 | 2.1 |
| 40 | 52.5 | 7 | 45.5 | 14.5 | 55 | 12 | M8×1.25 | 16 | 10 | 9 | 4.5 | 38 | M6×1.0 | 28.5 | G1/8 | 7.5 | 3 | 8.5 | 3.5 | 9 | 2.1 |
| 50 | 53.5 | 8 | 45.5 | 14.5 | 65.5 | 16 | M10×1.5 | 20 | 13 | 11 | 4.5 | 46.5 | M8×1.25 | 30.5 | G1/8 | 7.5 | 3 | 10.5 | 4.5 | 12 | 2.6 |
| 63 | 57 | 8 | 49 | 15 | 75.5 | 16 | M10×1.5 | 20 | 13 | 11 | 4.5 | 56.5 | M8×1.25 | 30.5 | G1/8 | 7.5 | 4 | 10.5 | 4.5 | 12 | 2.6 |
| 80 | 63 | 9 | 54 | 16 | 95.5 | 20 | M12×1.75 | 20 | 17 | 15 | 2.5 | 72 | M10×1.5 | - | G1/8 | 8.5 | 6 | 12.5 | 6 | 12 | 2.6 |
| 100 | 76 | 9 | 67 | 19 | 113.5 | 20 | M12×1.75 | 20 | 17 | 15 | 2.5 | 89 | M10×1.5 | - | G1/8 | 10.5 | 7 | 12.5 | 6 | 12 | 2.6 |
| 125 | 92 | 11 | 81 | 20 | 134.5 | 25 | M16×2.0 | 25 | 21 | - | - | 110 | M12×1.75 | - | G1/4 | 10.5 | 8 | 16.5 | 7 | 12 | 2.6 |





Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder. Please refer to page 303 for male thread dimensions.







Compact cylinder

ACE Series

ASE

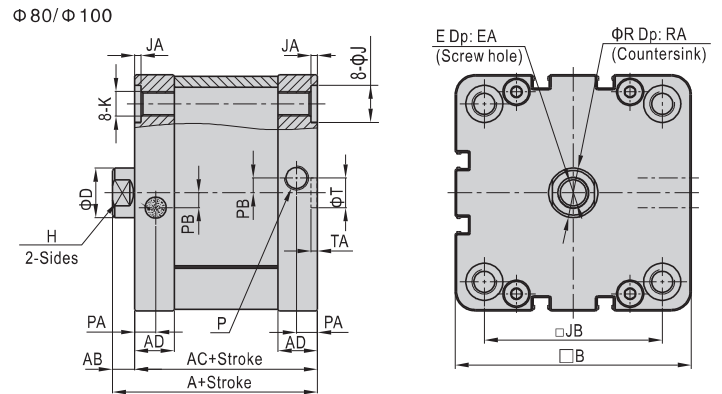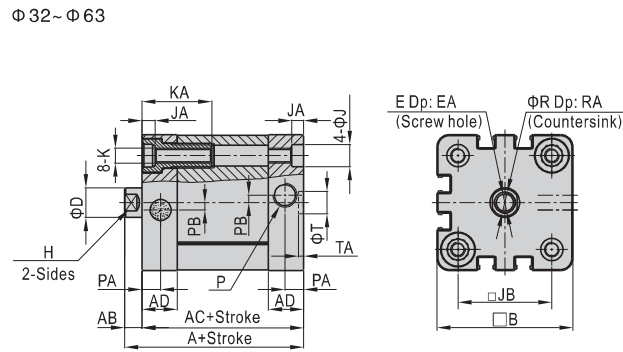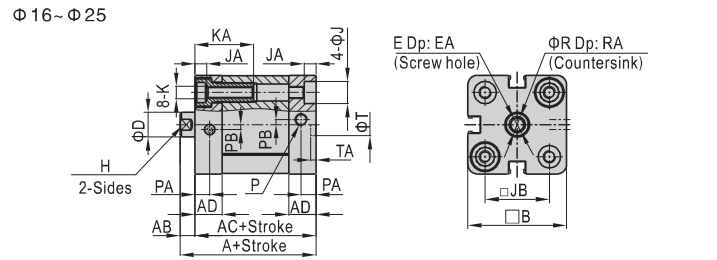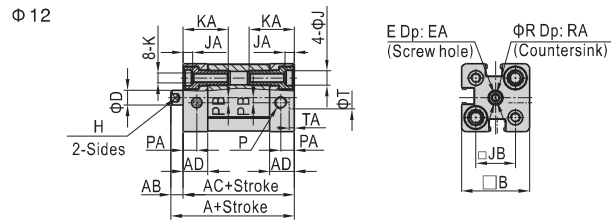

ATE

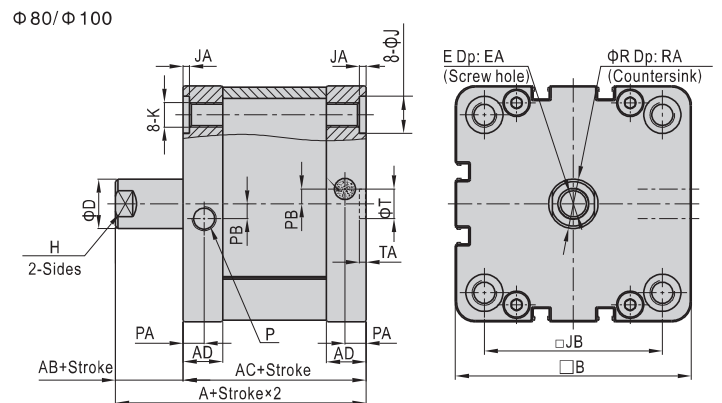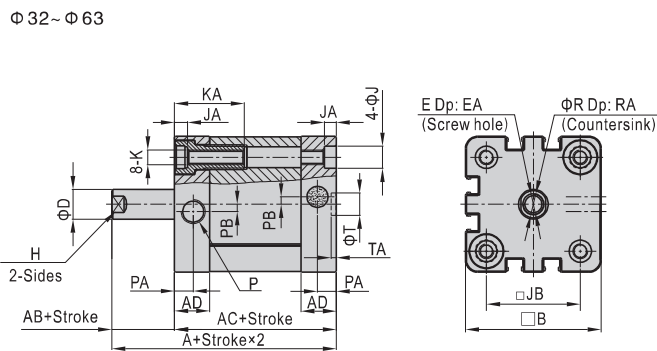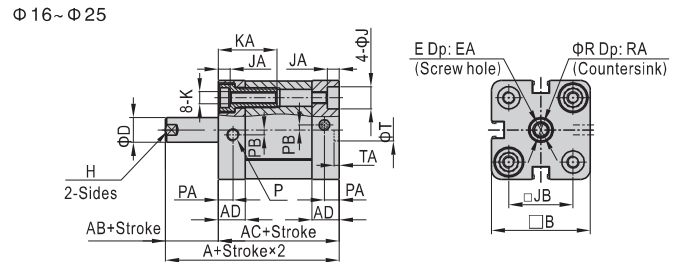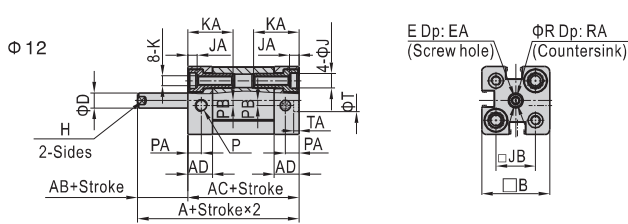


| Bore size/Item | A | AB | AC | AD | B | D | E | EA | H | J | JA | JB | K | KA | P | PA | PB | R | RA | T | TA |
|----------------|------|----|------|------|-------|----|----------|----|----|----|-----|------|---------|------|--------|------|----|------|-----|----|-----|
| 12 | 40 | 5 | 35 | 10 | 27.5 | 6 | M3×0.5 | 8 | 5 | 6 | 3.5 | 16 | M4×0.7 | 18.5 | M5×0.8 | 5.5 | 2 | 3.5 | 1.5 | 9 | 2.1 |
| 16 | 40 | 5 | 35 | 10 | 30 | 8 | M4×0.7 | 10 | 7 | 6 | 3.5 | 18 | M4×0.7 | 18.5 | M5×0.8 | 5.5 | 2 | 4.5 | 1.5 | 9 | 2.1 |
| 20 | 43 | 6 | 37 | 10.5 | 35.5 | 10 | M6×1.0 | 14 | 9 | 9 | 4.5 | 22 | M5×0.8 | 23.5 | M5×0.8 | 6 | 2 | 6.5 | 2.5 | 9 | 2.1 |
| 25 | 45 | 6 | 39 | 11 | 40 | 10 | M6×1.0 | 14 | 9 | 9 | 4.5 | 26 | M5×0.8 | 23.5 | M5×0.8 | 6 | 2 | 6.5 | 2.5 | 9 | 2.1 |
| 32 | 51 | 7 | 44 | 14 | 49.5 | 12 | M8×1.25 | 16 | 10 | 9 | 4.5 | 32.5 | M6×1.0 | 28.5 | G1/8 | 7.5 | 3 | 8.5 | 3.5 | 9 | 2.1 |
| 40 | 52.5 | 7 | 45.5 | 14.5 | 55 | 12 | M8×1.25 | 16 | 10 | 9 | 4.5 | 38 | M6×1.0 | 28.5 | G1/8 | 7.5 | 3 | 8.5 | 3.5 | 9 | 2.1 |
| 50 | 53.5 | 8 | 45.5 | 14.5 | 65.5 | 16 | M10×1.5 | 20 | 13 | 11 | 4.5 | 46.5 | M8×1.25 | 30.5 | G1/8 | 7.5 | 3 | 10.5 | 4.5 | 12 | 2.6 |
| 63 | 57 | 8 | 49 | 15 | 75.5 | 16 | M10×1.5 | 20 | 13 | 11 | 4.5 | 56.5 | M8×1.25 | 30.5 | G1/8 | 7.5 | 4 | 10.5 | 4.5 | 12 | 2.6 |
| 80 | 63 | 9 | 54 | 16 | 95.5 | 20 | M12×1.75 | 20 | 17 | 15 | 2.5 | 72 | M10×1.5 | - | G1/8 | 8.5 | 6 | 12.5 | 6 | 12 | 2.6 |
| 100 | 76 | 9 | 67 | 19 | 113.5 | 20 | M12×1.75 | 20 | 17 | 15 | 2.5 | 89 | M10×1.5 | - | G1/8 | 10.5 | 7 | 12.5 | 6 | 12 | 2.6 |

Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder. Please refer to page 303 for male thread dimensions.


Compact cylinder

ACE Series

ACED

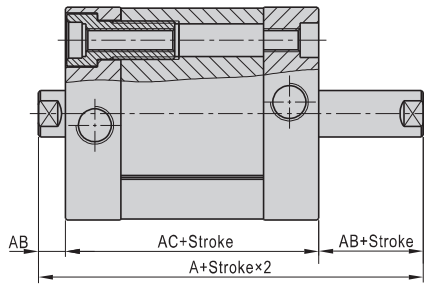

ACEJ

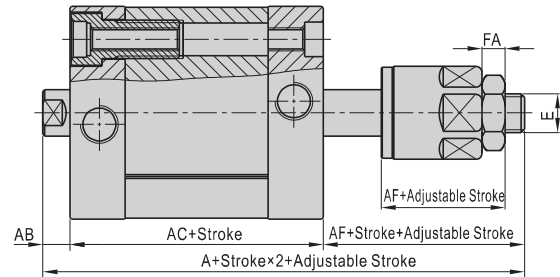


| Bore size\Item | A(ACED) | A(ACEJ) | AB | AC | AF | FA | E |
|----------------|---------|---------|----|------|------|----|----------|
| 12 | 45 | 57 | 5 | 35 | 17 | 4 | M5×0.8 |
| 16 | 45 | 61 | 5 | 35 | 21 | 5 | M6×1.0 |
| 20 | 49 | 68 | 6 | 37 | 25 | 6 | M8×1.25 |
| 25 | 51 | 70 | 6 | 39 | 25 | 6 | M8×1.25 |
| 32 | 58 | 78 | 7 | 44 | 27 | 6 | M10×1.25 |
| 40 | 59.5 | 79.5 | 7 | 45.5 | 27 | 6 | M10×1.25 |
| 50 | 61.5 | 81.5 | 8 | 45.5 | 28 | 7 | M12×1.25 |
| 63 | 65 | 85 | 8 | 49 | 28 | 7 | M12×1.25 |
| 80 | 72 | 92 | 9 | 54 | 29 | 8 | M16×1.5 |
| 100 | 85 | 105 | 9 | 67 | 29 | 8 | M16×1.5 |
| 125 | 103 | 127.5 | 11 | 81 | 35.5 | 10 | M20×1.5 |


Remark:

1. The unmarked dimension is the same as ACE standard type
2. The dimensions of magnet type cylinder are the same as non-magnet type cylinder.

TACE

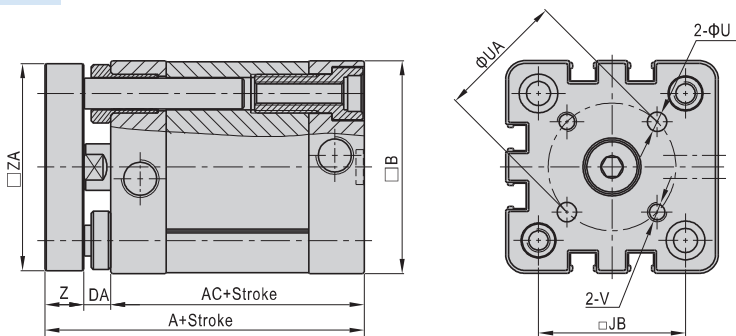


Male thread

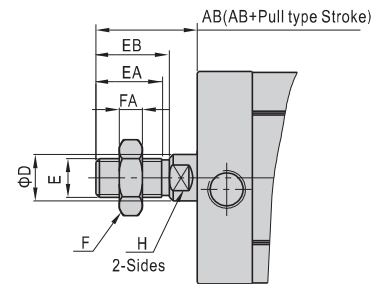

| Bore size\Item | AB | D | E | EA | EB | F | FA | H |
|----------------|----|----|----------|----|----|----|----|----|
| 12 | 15 | 6 | M5×0.8 | 9 | 10 | 8 | 4 | 5 |
| 16 | 17 | 8 | M6×1.0 | 11 | 12 | 10 | 5 | 7 |
| 20 | 22 | 10 | M8×1.25 | 15 | 16 | 12 | 6 | 9 |
| 25 | 22 | 10 | M8×1.25 | 15 | 16 | 12 | 6 | 9 |
| 32 | 26 | 12 | M10×1.25 | 17 | 19 | 17 | 6 | 10 |
| 40 | 26 | 12 | M10×1.25 | 17 | 19 | 17 | 6 | 10 |
| 50 | 30 | 16 | M12×1.25 | 20 | 22 | 17 | 7 | 13 |
| 63 | 30 | 16 | M12×1.25 | 20 | 22 | 17 | 7 | 13 |
| 80 | 37 | 20 | M16×1.5 | 26 | 28 | 23 | 8 | 17 |
| 100 | 37 | 20 | M16×1.5 | 26 | 28 | 23 | 8 | 17 |
| 125 | 51 | 25 | M20×1.5 | 38 | 40 | 26 | 10 | 21 |

TACED

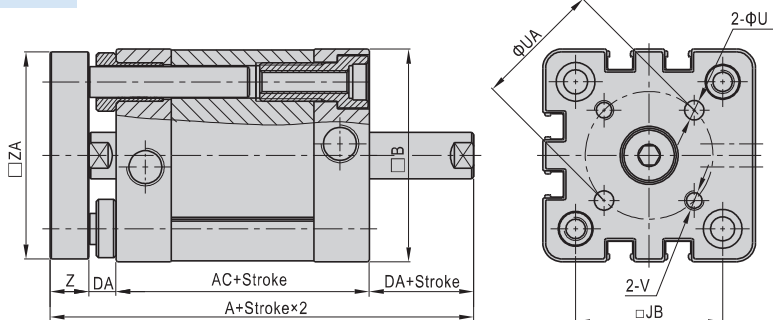

| Bore size\Item | A(TACE) | A(TACED) | AC | B | DA | JB | U | UA | V | Z | ZA |
|----------------|---------|----------|------|-------|----|------|----|----|---------|----|------|
| 12 | 46 | 51 | 35 | 27.5 | 5 | 16 | 3 | 12 | M3×0.5 | 6 | 26.5 |
| 16 | 46 | 51 | 35 | 30 | 5 | 18 | 3 | 14 | M3×0.5 | 6 | 29 |
| 20 | 51 | 57 | 37 | 35.5 | 6 | 22 | 4 | 17 | M4×0.7 | 8 | 34.5 |
| 25 | 53 | 59 | 39 | 40 | 6 | 26 | 5 | 22 | M5×0.8 | 8 | 39 |
| 32 | 61 | 68 | 44 | 49.5 | 7 | 32.5 | 5 | 28 | M5×0.8 | 10 | 48 |
| 40 | 62.5 | 69.5 | 45.5 | 55 | 7 | 38 | 5 | 33 | M5×0.8 | 10 | 53.5 |
| 50 | 65.5 | 73.5 | 45.5 | 65.5 | 8 | 46.5 | 6 | 42 | M6×1.0 | 12 | 64 |
| 63 | 69 | 77 | 49 | 75.5 | 8 | 56.5 | 6 | 50 | M6×1.0 | 12 | 74 |
| 80 | 77 | 86 | 54 | 95.5 | 9 | 72 | 8 | 65 | M8×1.25 | 14 | 94 |
| 100 | 90 | 99 | 67 | 113.5 | 9 | 89 | 10 | 80 | M10×1.5 | 14 | 112 |

Remark:

1. The unmarked dimension is the same as ACE standard type
2. The dimensions of magnet type cylinder are the same as non-magnet type cylinder.